


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N 008	CJJ 11/18/2014	~	

TABLE A:

TYPE	Dimension			
	A	B	C	W
1	3.00	0.70	6.00	5.50
2	4.00	0.70	14.30	5.50
3	4.00	0.70	10.30	5.50
4				
5				
6				
7				
8				

- NOTES:
- MATERIAL
    - INSULATOR:THERMOPLASTIC(UL 94V-0),
    - CONTACT MATERIAL:COPPER ALLOY.
  - SPECIFICATION
    - CURRENT RATING:1.0 Amp.
    - INSULATION RESISTANCE:1000MΩ Min.
    - DIELECTRIC WITHSTANDING:300VAC.
    - CONTACT RESISTANCE:50mΩ Max.
    - OPERATING TEMPERATURE:-40°C TO+105°C.

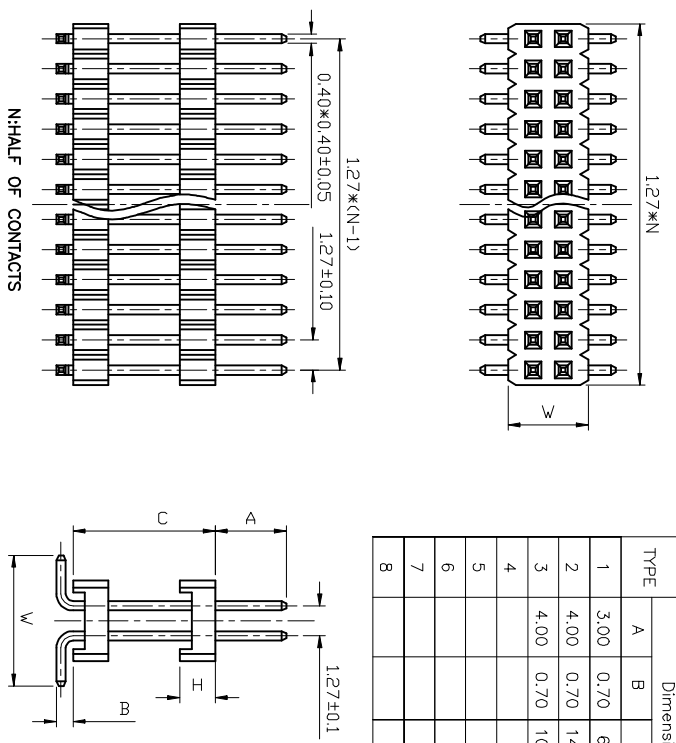

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	TITLE
X, ±0.60	X, ±5°	mm	1.27mm PITCH PIN HEADER
.X, ±0.38	.X, ±3°	mm	DUAL ROW SMT
.XX, ±0.25	.XX, ±2°	mm	SERIES LL1013-03C
DRAWING TYPE CUSTOMER		SCALE 5:1 SHEET	
DRAWING NO.		DRAWING NO.	

慈溪蓝翎电子有限公司  
CIXI LANLING ELECTRONICS CO., LTD.