
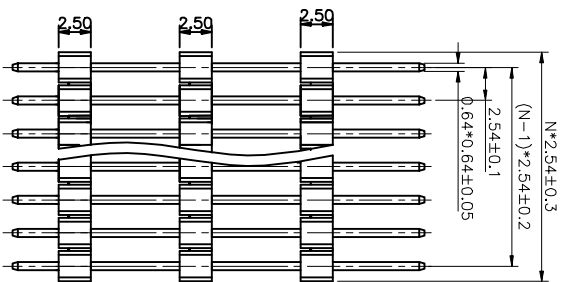



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	

NOTES:

- SPECIFICATION
 - CURRENT RATING:1.5 Amp.
 - INSULATION RESISTANCE:1000MΩ Min.
 - DIELECTRIC WITHSTANDING:600VAC.
 - CONTACT RESISTANCE:50mΩ Max.
 - TEMPERATURE RANGE:-40°C TO+105°C.

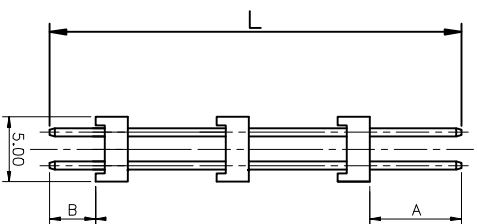

N:NUMBER OF CONTACTS

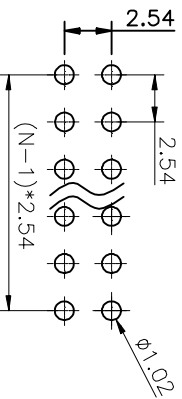

RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)

A=3.0±0.2MM
B=6.0±0.2MM

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5°	mm	BOARD SPACERS PIN HEADER
.X	±0.38	.X	±3°	SHEET SIZE	PITCH 2.54mm TYPE
.XX	±0.25	.XX	±2°	A4	LL1012A-02B
DRAWING TYPE	CUSTOMER	SCALE	1:1	SHEET	1 OF 2
DRAWING NO.					

慈溪电子

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.