

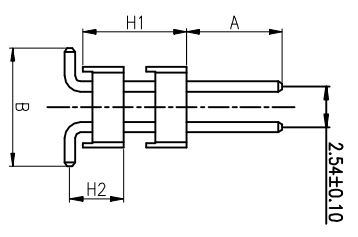
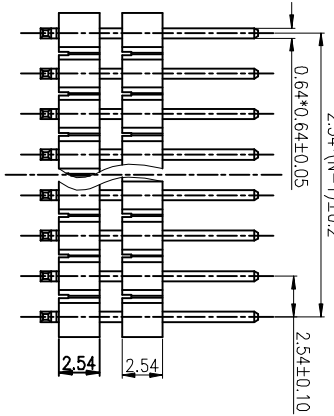


REV	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N 0008	CJJ 11/18/2014	~	

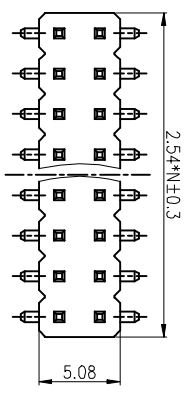

- NOTES:
- MATERIAL
 - INSULATOR:THERMOPLASTIC(U94 V-0).
 - CONTACT MATERIAL: COPPER ALLOY.
 - SPECIFICATION
 - CURRENT RATING:1.5 Amp.
 - INSULATION RESISTANCE:1000MΩ Min.
 - DIELECTRIC WITHSTANDING:600VAC.
 - CONTACT RESISTANCE:50mΩ Max.
 - OPERATING TEMPERATURE:-40°C TO+105°C.

TYPE	IDM	A DIM	B DIM	H DIM	H2 DIM	H2 PIN LENGTH
1	6.00	7.40	6.50	3.36	15.30	
2	6.00	7.40	15.00	3.36	23.80	
3	5.80	7.40	6.50	3.81	15.60	
4						
5						
6						
7						
8						
9						
10						
11						

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
X	±0.38	X	±3°
XX	±0.25	XX	±2°

DRAWING TYPE	CUSTOMER	SHEET	1 OF 1
DRAWING NO.			

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

PROJECTION: TITLE: 2.54mm PITCH PIN HEADER

UNITS: mm

SHEET SIZE: A4 SERIES: L11012A-02D DUAL ROW S.M.T

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.

