
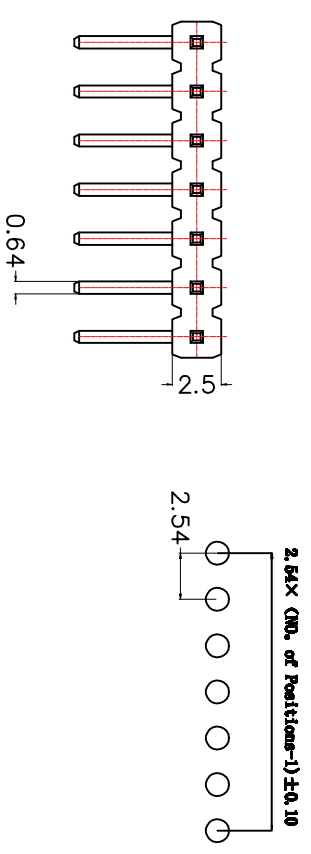


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	
	:			
	:			

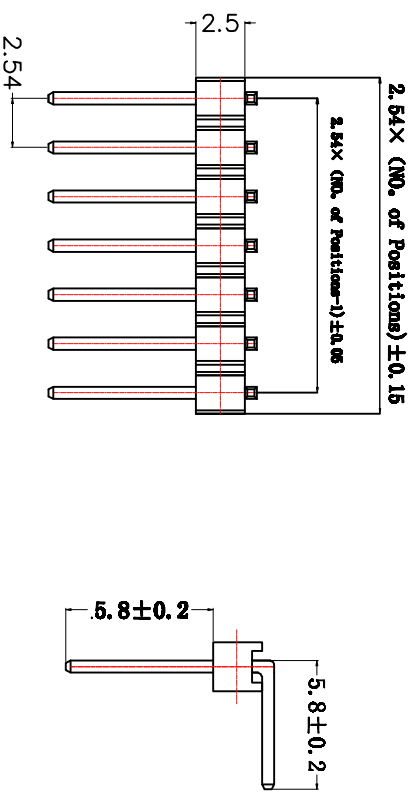

- NOTES:
- MATERIALS
    - CONTACT MATERIAL: COPPER ALLOY.
    - INSULATOR: PBT WITH GLASS FIBER.
  - SPECIFICATIONS
    - CURRENT RATING: 3A.
    - OPERATING TEMPERATURE: -40°C TO +105°C.
    - INSULATION RESISTANCE: 1000MΩ MIN.
    - CONTACT RESISTANCE: 20mΩ MAX.
    - DIELECTRIC WITHSTANDING: 600 VAC.

RECOMMEND P.C. BOARD LAYOUT

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	2.54mm Single Row Pin Header	
.X	±0.38	.X	±3°	SHEET SIZE	A4	R/A	
.XX	±0.25	.XX	±2°	SERIES LLL1010-3A			
DRAWING TYPE CUSTOMER		SCALE 1:1		SHEET 1 OF 1		DRAWING NO. C-DS1022-1*XXDX-X-K	

**慈溪蓝翎电子有限公司**  
CIXI LANLING ELECTRONICS CO., LTD.