

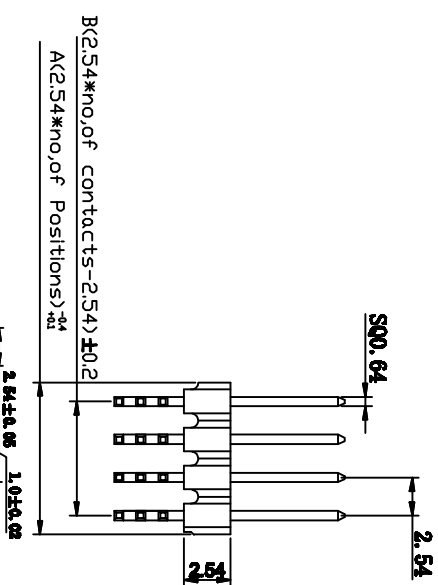


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	




SPECIFICATIONS

Current Rating: 3Amps
 Insulator resistance: 5000 Megohms min
 Dielectric Withstanding: AC 500V
 Operating Temperature: -40°C to +105°C
 Insulator Material: PBT
 Contact Material: Brass
 Plating: Gold flash
 UNSPECIFIED TOLERANCE: ±0.20

Dimensions List

Contacts	Dimensions		Contacts		Dimensions	
	A	B		A	B	
3*1	2.54	0	3*21	53.34	50.8	
3*2	5.08	2.54	3*22	55.88	53.34	
3*3	7.62	5.08	3*23	58.42	55.88	
3*4	10.16	7.62	3*24	60.96	58.42	
3*5	12.70	10.16	3*25	63.50	60.96	
3*6	15.24	12.70	3*26	66.04	63.50	
3*7	17.78	15.24	3*27	68.58	66.04	
3*8	20.32	17.78	3*28	71.12	68.58	
3*9	22.86	20.32	3*29	73.66	71.12	
3*10	25.40	22.86	3*30	76.20	73.66	
3*11	27.94	25.40	3*31	78.74	76.20	
3*12	30.48	27.94	3*32	81.28	78.74	
3*13	33.02	30.48	3*33	83.82	81.28	
3*14	35.56	33.02	3*34	86.36	83.82	
3*15	38.10	35.56	3*35	88.90	86.36	
3*16	40.64	38.10	3*36	91.44	88.90	
3*17	43.18	40.64	3*37	93.98	91.44	
3*18	45.72	43.18	3*38	96.52	93.98	
3*19	48.26	45.72	3*39	99.06	96.52	
3*20	50.80	48.26	3*40	101.6	99.06	



GENERAL TOLERANCE		ANGLE TOLERANCE	
X, ±0.60	X, ±5°	X, ±5°	
.X, ±0.38	.X, ±3°	.XX, ±2°	
.XX, ±0.25	.XX, ±2°		

DRAWING TYPE	CUSTOMER
SCALE	1:1
DRAWING NO.	SHEET 1 OF 1

PROJECTION: TITLE: 2.54*2.54 3*NP 90° 排针

UNITS: mm

SHEET SIZE: A4 SERIES: LL1010-3

慈溪蓝翎电子有限公司
 CIXI LANLING ELECTRONICS CO., LTD.