


REV	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	


N: NUMBER OF CONTACTS/2

NOTES:

- MATERIAL
 - INSULATOR:THERMOPLASTIC(U,94 V-0),
 - CONTACT MATERIAL: COPPER ALLOY.
- SPECIFICATION
 - CURRENT RATING: 1.5 Amp.
 - INSULATION RESISTANCE: 1000MΩ Min.
 - DIELECTRIC WITHSTANDING: 600VAC.
 - CONTACT RESISTANCE: 50mΩ Max.
 - OPERATING TEMPERATURE: -40°C TO +105°C.

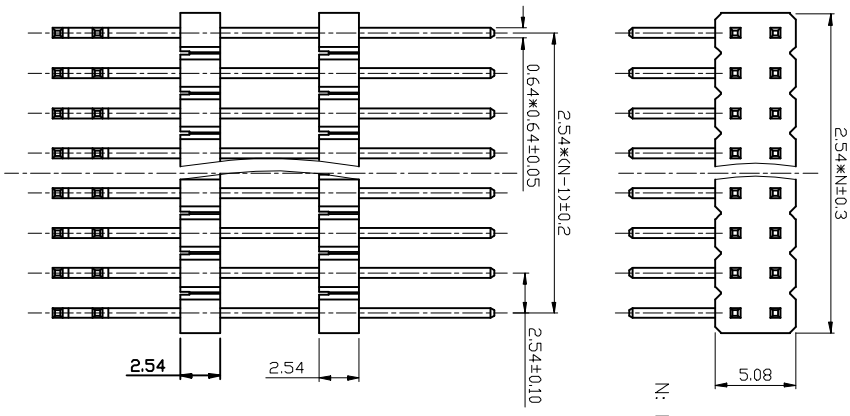

TYPE	DIM A	DIM B	DIM H1	DIM H	PIN LENGTH
1	8.60	5.50	11.37	5.25	31.50 26.40
2					
3					
4					
5					
6					



RECOMMEND PCB LAYOUT (TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X	±0.60	X	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.			

PROJECTION	TITLE
UNITS	2.54mm PITCH PIN HEADER
SHEET SIZE	DUAL ROW RIGHT ANGLE
A4	SERIES LL1012A-02E

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.

