



| REV. | DESCRIPTION | DRAWN | CHECKED | APPROVED |
|------|--------------|----------------|---------|----------------|
| A | NEW RELEASE | ZQJ 11/18/2014 | ~ | ZQJ 11/18/2014 |
| B | ADD P/N CODE | CJJ 11/18/2014 | ~ | |

- NOTES:
- MATERIAL
 - INSULATOR:THERMOPLASTIC(Ul94 V-0);
 - CONTACT MATERIAL:COOPER ALLOY.
 - SPECIFICATION
 - CURRENT RATING:1.5 Amp.
 - INSULATION RESISTANCE:1000MΩ Min.
 - DIELECTRIC WITHSTANDING:600VAC.
 - CONTACT RESISTANCE:50mΩ Max.
 - OPERATING TEMPERATURE:-40°C TO+105°C.

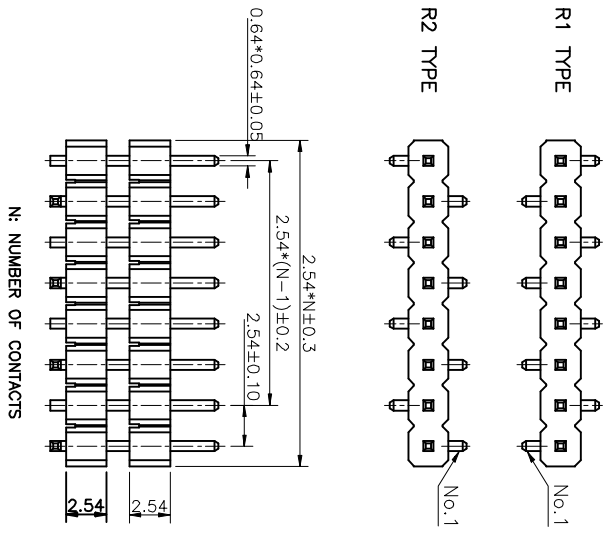

| TYPE | DIM. A | DIM. B | DIM. H1 | DIM. H2 | LENGTH | PIN |
|------|--------|--------|---------|---------|--------|-----|
| 1 | 3.00 | 4.70 | 6.50 | 4.38 | 12.90 | |
| 2 | 3.00 | 4.83 | 6.50 | 3.50 | 12.10 | |
| 3 | 7.00 | 4.70 | 6.50 | 3.50 | 16.00 | |
| 4 | | | | | | |
| 5 | | | | | | |
| 6 | | | | | | |
| 7 | | | | | | |
| 8 | | | | | | |
| 9 | | | | | | |
| 10 | | | | | | |
| 11 | | | | | | |
| 12 | | | | | | |
| 13 | | | | | | |
| 14 | | | | | | |

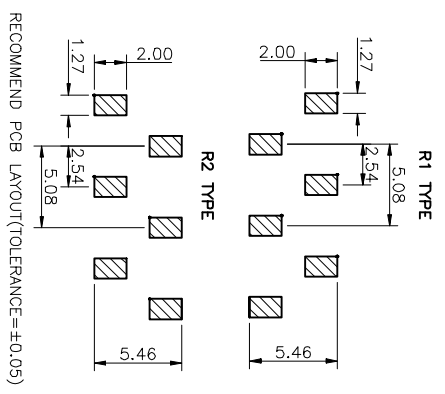

| GENERAL | TOLERANCE | ANGLE | TOLERANCE | PROJECTION | TITLE |
|---------|-----------|-------|-----------|------------|-------------------------|
| X. | ±0.60 | X. | ±5° | mm | 2.54mm PITCH PIN HEADER |
| X | ±0.38 | X | ±3° | | SINGLE ROW S.M.T TYPE |
| .XX | ±0.25 | .XX | ±2° | | |

| DRAWING TYPE | CUSTOMER | SCALE | SHEET | 1 OF | 1 |
|--------------|----------|-------|-------|------|---|
| DRAWING NO. | 1:1 | | | | |

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.