
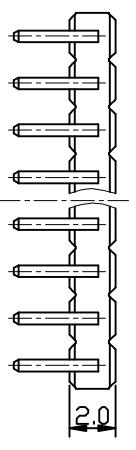



REV	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	

NOTES:

1. MATERIAL
 - 1.1 INSULATOR:THERMOPLASTIC(U94 V-0).
 - 1.2 CONTACT MATERIAL:COPPER ALLOY.
2. SPECIFICATION
 - 2.1 CURRENT RATING:1.5 Amp.
 - 2.2 INSULATION RESISTANCE:1000MΩ Min.
 - 2.3 DIELECTRIC WITHSTANDING:600VAC.
 - 2.4 CONTACT RESISTANCE:50mΩ Max.
 - 2.5 OPERATING TEMPERATURE:-40°C To+105°C.

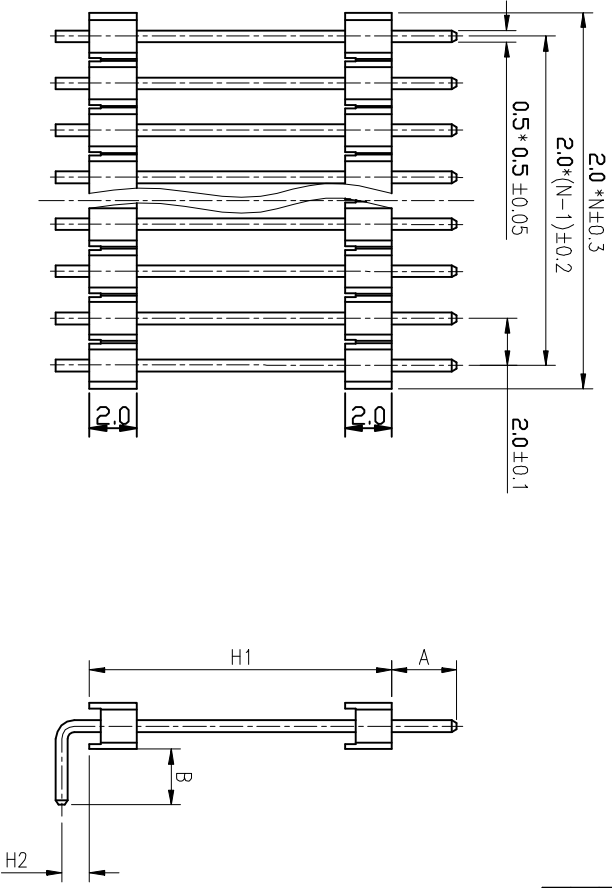

N: NUMBER OF CONTACTS



RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

TYPE	DIM A	DIM B	DIM H1	DIM H2	PIN LENGTH
1	3.50	3.00	16.33	1.50	25.10
2	3.50	3.00	6.33	1.50	15.10
3					
4					
5					
6					
7					
8					
9					
10					
11					
12					

GENERAL TOLERANCE	ANGLE	TOLERANCE
X, ±0.60	X, .X	±5°
.X, ±0.38	.XX	±3°
.XX, ±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER	SHEET	1 OF 1
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.			

PROJECTION	TITLE
UNITS	2.0MM PIN HEADER
SHEET SIZE	BOARD SPACES RIGHT ANGLE
A4	LL1012B-01C

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.