

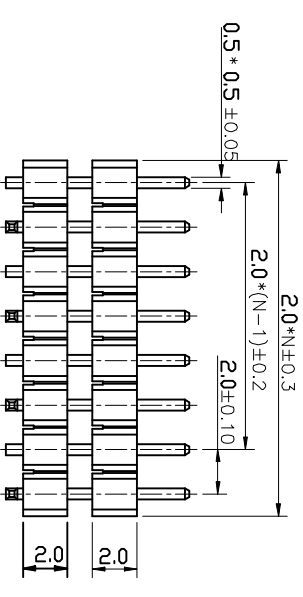


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	<b>ADD P/N CODE</b>	CJJ 11/18/2014	~	


- NOTES:
- MATERIAL
    - INSULATOR:THERMOPLASTIC(UL94 V-0).
    - CONTACT MATERIAL:COPPER ALLOY.
  - SPECIFICATION
    - CURRENT RATING:1.5 Amp.
    - INSULATION RESISTANCE:1000MΩ Min.
    - DIELECTRIC WITHSTANDING:600VAC.
    - CONTACT RESISTANCE:50mΩ Max.
    - OPERATING TEMPERATURE:-40°C TO+105°C.

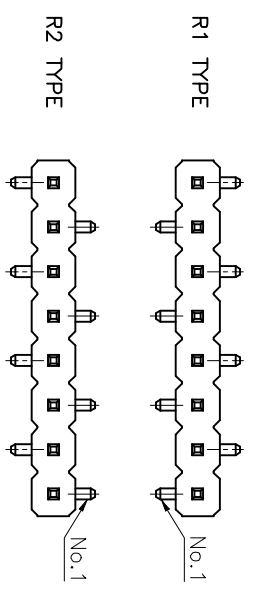

N: NUMBER OF CONTACTS



TYPE	DIM. A	DIM. B	DIM. H1	DIM. H2	LENGTH	PIN
1	3.00	4.70	6.50	4.38	12.90	
2	3.00	4.83	6.50	3.50	12.10	
3	7.00	4.70	6.50	3.50	16.00	
4						
5						
6						
7						
8						
9						
10						
11						
12						
13						
14						

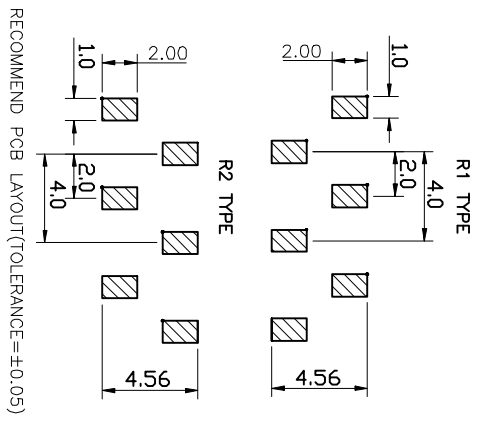

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

GENERAL TOLERANCE	ANGLE	TOLERANCE
X. ±0.60	X. ±5°	
.X ±0.38	.X ±3°	
.XX ±0.25	.XX ±2°	

DRAWING TYPE	CUSTOMER	SCALE	SHEET	1 OF 1
		1:1		

PROJECTION	TITLE
UNITS mm	2.54mm PITCH PIN HEADER SINGLE ROW S.M.T TYPE
SHEET SIZE A4	SERIES LL1012B-01D

**慈溪蓝翎电子有限公司**  
CIXI LANLING ELECTRONICS CO., LTD.

