


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	

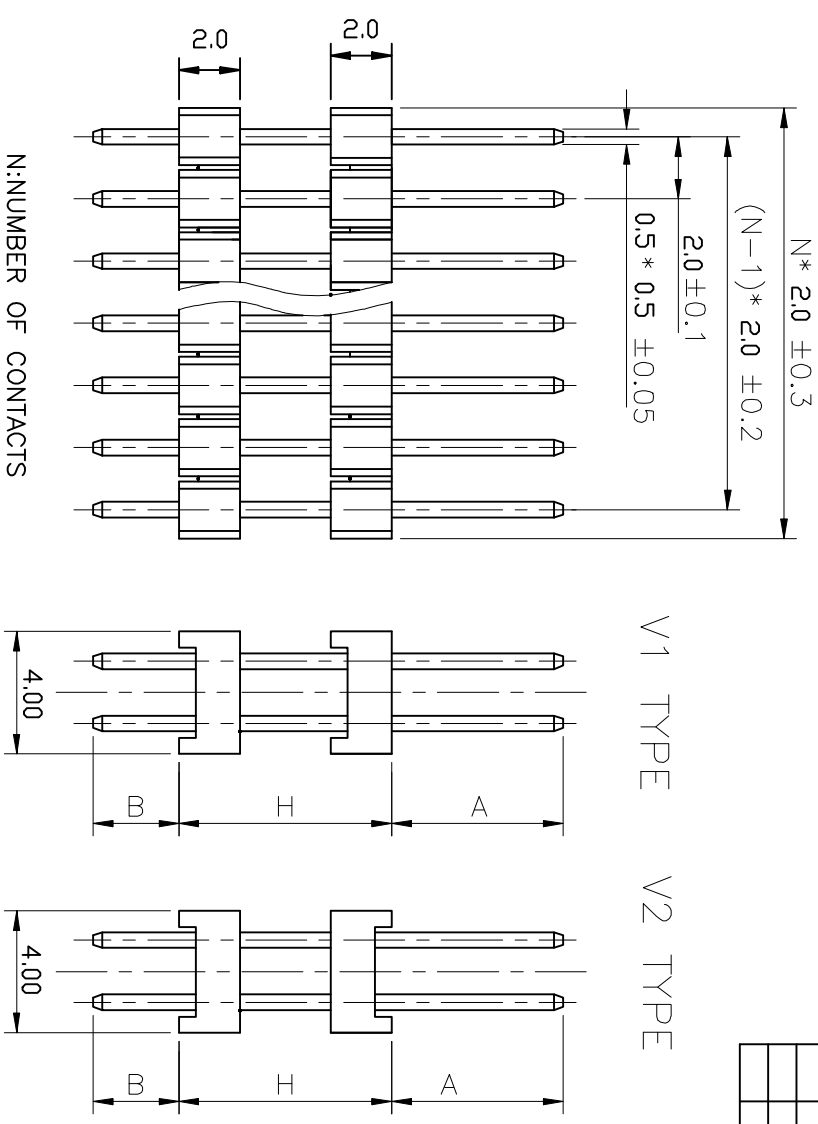


V1 TYPE      V2 TYPE

NOTES:

1. SPECIFICATION
  - 1.1 CURRENT RATING:1.5 Amp.
  - 1.2 INSULATION RESISTANCE:1000MΩ Min.
  - 1.3 DIELECTRIC WITHSTANDING:600VAC.
  - 1.4 CONTACT RESISTANCE:50mΩ Max.
  - 1.5 TEMPERATURE RANGE:-40°C To+105°C.

N:NUMBER OF CONTACTS

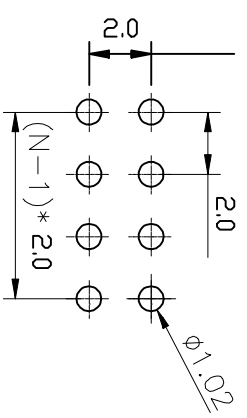


RECOMMEND PCB LAYOUT  
(TOLERANCE=±0.05)

GENERAL TOLERANCE	ANGLE TOLERANCE
X. ±0.60	X. ±5°
.X ±0.38	.X ±3°
.XX ±0.25	.XX ±2°

DRAWING TYPE	CUSTOMER
SCALE	1:1
DRAWING NO.	SHEET
	1 OF 2

PROJECTION	TITLE
UNITS	20MM PIN HEADER BOARD SPACES
SHEET SIZE	A4
SERIES	LL1012B-02A



**慈溪蓝翎电子有限公司**  
CIXI LANLING ELECTRONICS CO., LTD.

