



REV	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	

N: NUMBER OF CONTACTS/2

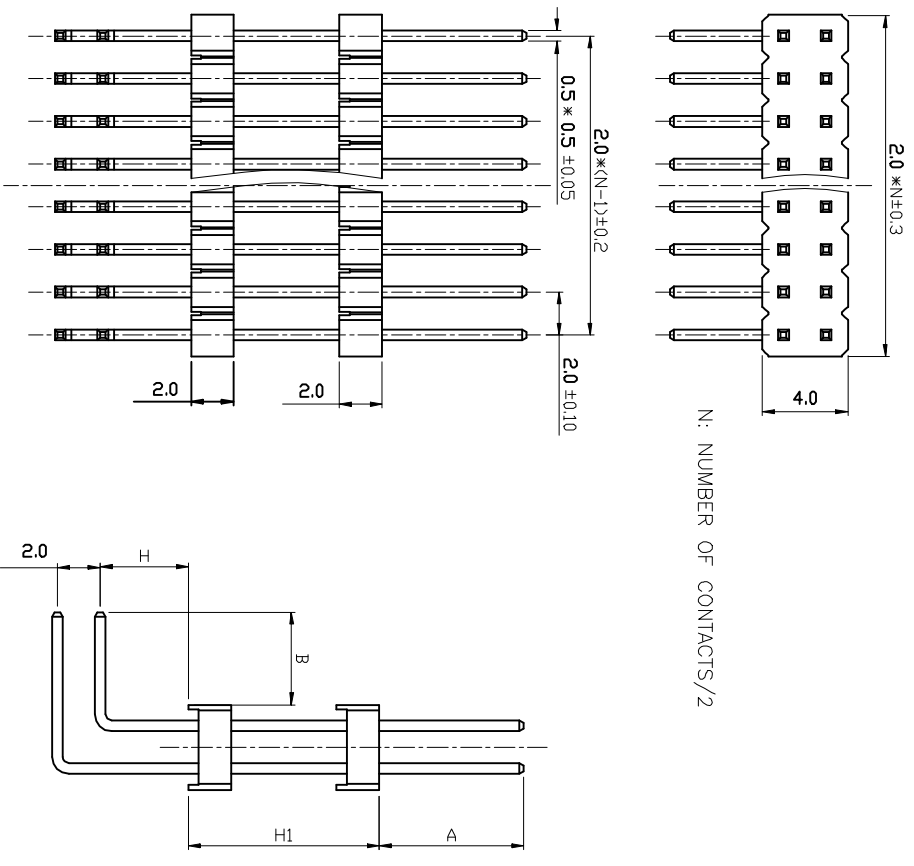

- NOTES:
- MATERIAL
 - INSULATOR: THERMOPLASTIC(U94 V-0).
 - CONTACT MATERIAL: COPPER ALLOY.
 - SPECIFICATION
 - CURRENT RATING: 1.5 Amp.
 - INSULATION RESISTANCE: 1000MΩ Min.
 - DIELECTRIC WITHSTANDING: 600VAC.
 - CONTACT RESISTANCE: 50mΩ Max.
 - OPERATING TEMPERATURE: -40°C TO +105°C.

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)



GENERAL TOLERANCE		ANGLE TOLERANCE	
X	±0.60	X	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE		1:1	SHEET
DRAWING NO.		1 OF 1	

PROJECTION	TITLE
UNITS	2.0MM P1N HEADER
SHEET SIZE	BOARD SPACES RIGHT ANGLE
A4	SERIES LL1012B-02C



慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.