


N=1/2NUMBER OF CONTACTS

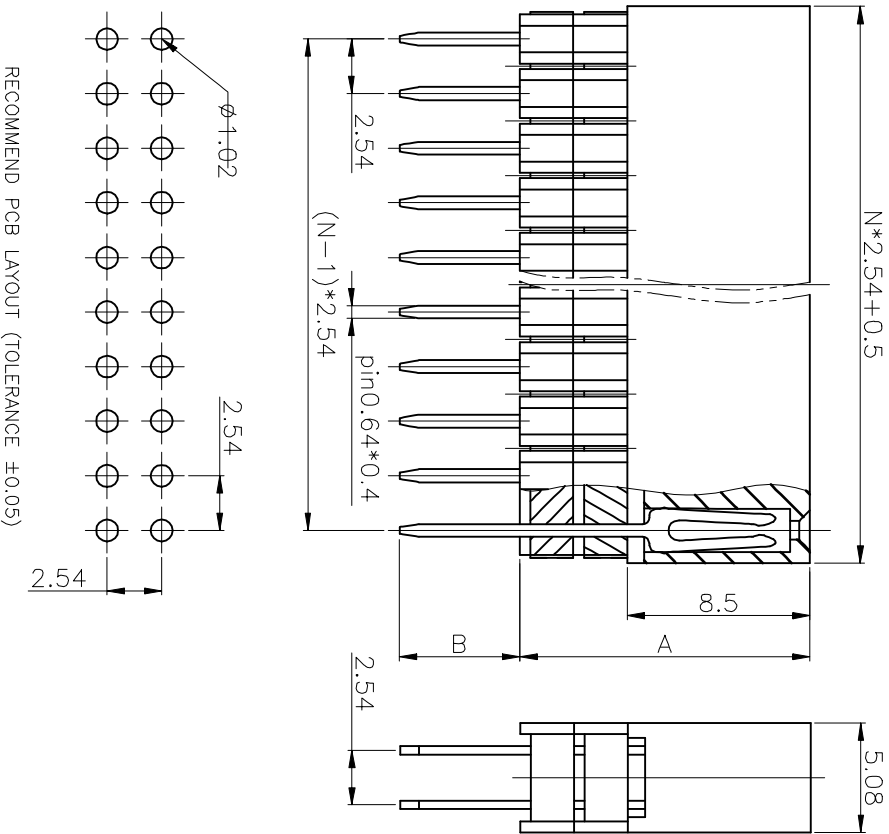

TYPE	Dimension	
	A	B
1	11.05	3.80
2	11.05	8.50
3	11.05	12.4
4	11.05	14.4
5	13.5	1.30
6	13.5	6.00
7	13.5	10.0
8	13.5	12.0
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	


NOTES:

1. ELECTRICAL CHARACTERISTICS:
 - 1.1 CONTACT RESISTANCE: 50mΩ Max.
 - 1.2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - 1.3 INSULATION RESISTANCE: 1000MΩ Min.
2. ENVIRONMENT CHARACTERISTICS:
 - 2.1 OPERATING TEMPERATURE: -40°C~+105°C.
 - 2.2 RESISTANCE TO SOLDERING HEAT: 260±5°C,5±0.5s.

GENERAL TOLERANCE	ANGLE TOLERANCE
X, ±0.60	X, ±5°
.X, ±0.38	.X, ±3°
.XX, ±0.25	.XX, ±2°

DRAWING TYPE	CUSTOMER
SCALE	1:1
DRAWING NO.	SHEET 1 OF 1

PROJECTION	TITLE
UNITS mm	FEMALE HEADER PITCH
SHEET SIZE A4	2.54mm V/T STACK TYPE
SERIES	LL1016-1 LL1016-2B


慈溪蓝翎电子有限公司
 CIXI LANLING ELECTRONICS CO., LTD.