
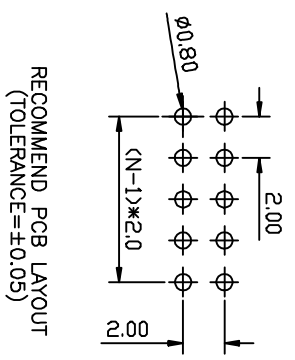


REV	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW DRAWING RELEASE	ZQJ09/22/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	

- NOTES:
- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
 - ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE: -40°C~+105°C.

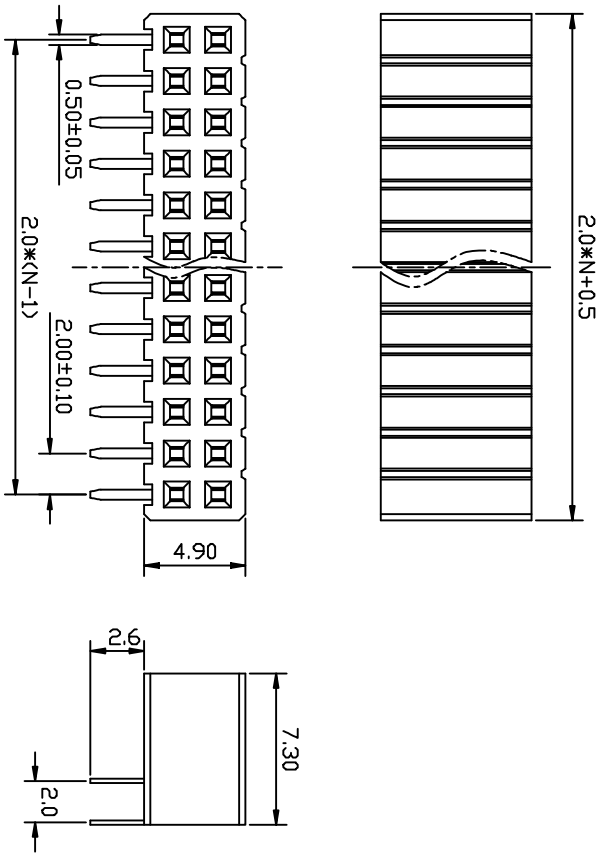

GENERAL TOLERANCE	ANGLE TOLERANCE
X, ±0.60	X, ±5°
.X, ±0.38	X, ±3°
.XX, ±0.25	.XX, ±2°

DRAWING TYPE	CUSTOMER
SCALE	1:1
DRAWING NO.	SHEET
	1 OF 1

PROJECTION	TITLE	SIDE ENTRY RIGHT ANGLE
UNITS	mm	
SHEET SIZE	A4	
SERIES	LL1017-6	

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.

