


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	


NOTES:

- ELECTRICAL CHARACTERISTICS:
  - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
  - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
  - OPERATING TEMPERATURE: 0°C~+85°C.
  - STORAGE TEMPERATURE: -20°C~+70°C.

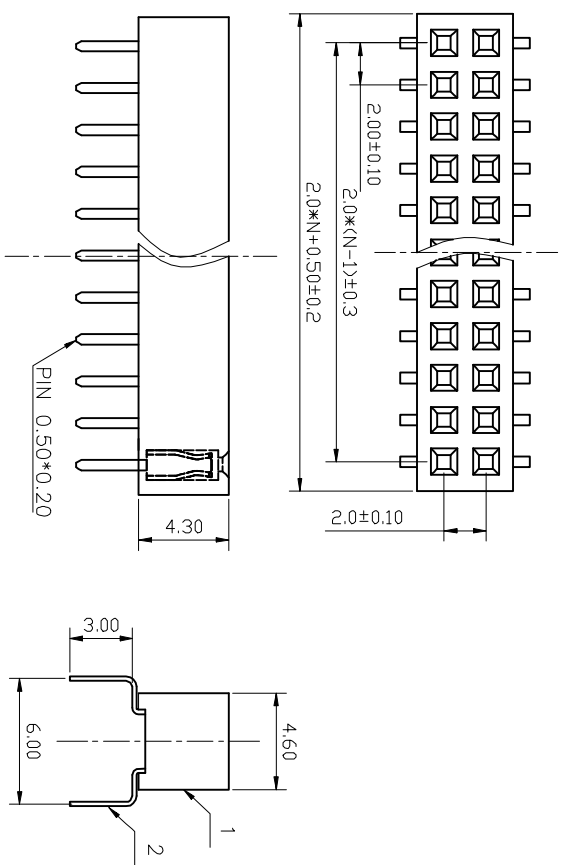

N: HALF OF PIN POSITIONS

RECOMMEND PCB LAYOUT  
(TOLERANCE=±0.05)

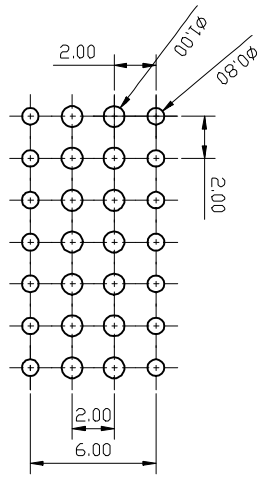

ITEM	PART NAME	PART NO.	MATERIALS	FINISHED	DRAWING NO.	DRAWING TYPE	SCALE	CUSTOMER	SHEET	1 OF 1
2	CONTACT		COPPER ALLOY					GOLD PLATED		
1	HOUSING		THERMOPLASTIC					UL 94 V-0		
1	PART NAME	2			3				4	5

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	TITLE
X, ±0.60	X, ±5°	UNITS	BOTTOM ENTRY TYPE DUAL ROW
X, ±0.38	X, ±3°	SHEET SIZE	
.XX, ±0.25	.XX, ±2°	mm	
		A4	
		SERIES	LL1017-11B

慈溪蓝翎电子有限公司	
CIXI LANLING ELECTRONICS CO., LTD.	