

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	




**SPECIFICATIONS**

Current Rating: **2Amps**  
 Insulator Resistance: **5000Megaohms min.**  
 Dielectric Withstanding: **AC 500V**  
 Operating Temperature: **-40° ~ +105 ° C**  
 Contact Material: **Phosphor bronze**  
 Insulator Material: **PA6T**  
 Plating: **Gold Flash**

UNSPECIFIED TOLERANCE: **±0.20**

**Dimensions List**

Contacts Per row	Dimensions		Contacts Per row	Dimensions	
	A	B		A	B
2*1	2.0	0	2*21	42.0	40.0
2*2	4.0	2.0	2*22	44.0	42.0
2*3	6.0	4.0	2*23	46.0	44.0
2*4	8.0	6.0	2*24	48.0	46.0
2*5	10.0	8.0	2*25	50.0	48.0
2*6	12.0	10.0	2*26	52.0	50.0
2*7	14.0	12.0	2*27	54.0	52.0
2*8	16.0	14.0	2*28	56.0	54.0
2*9	18.0	16.0	2*29	58.0	56.0
2*10	20.0	18.0	2*30	60.0	58.0
2*11	22.0	20.0	2*31	62.0	60.0
2*12	24.0	22.0	2*32	64.0	62.0
2*13	26.0	24.0	2*33	66.0	64.0
2*14	28.0	26.0	2*34	68.0	66.0
2*15	30.0	28.0	2*35	70.0	68.0
2*16	32.0	30.0	2*36	72.0	70.0
2*17	34.0	32.0	2*37	74.0	72.0
2*18	36.0	34.0	2*38	76.0	74.0
2*19	38.0	36.0	2*39	78.0	76.0
2*20	40.0	38.0	2*40	80.0	78.0

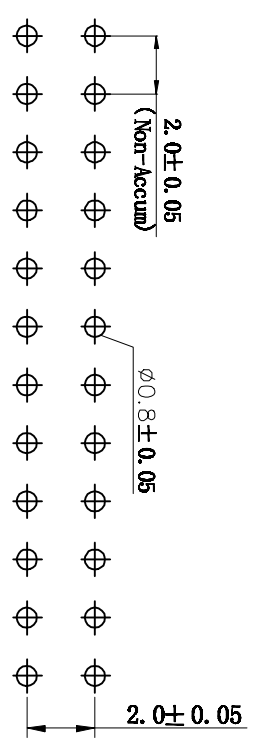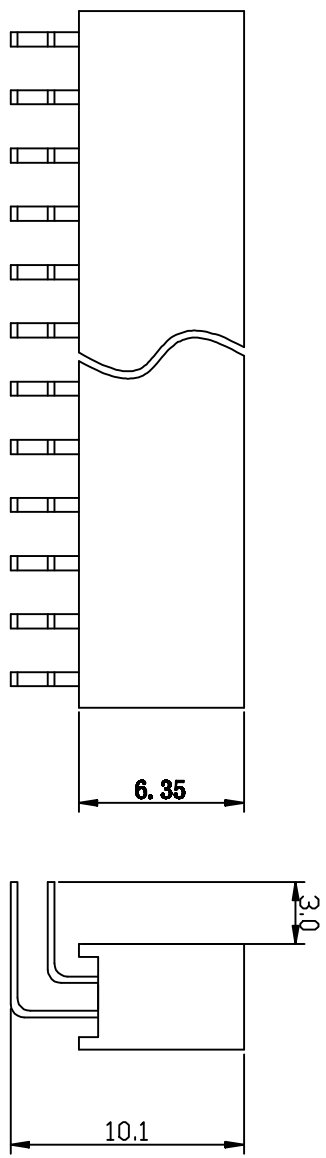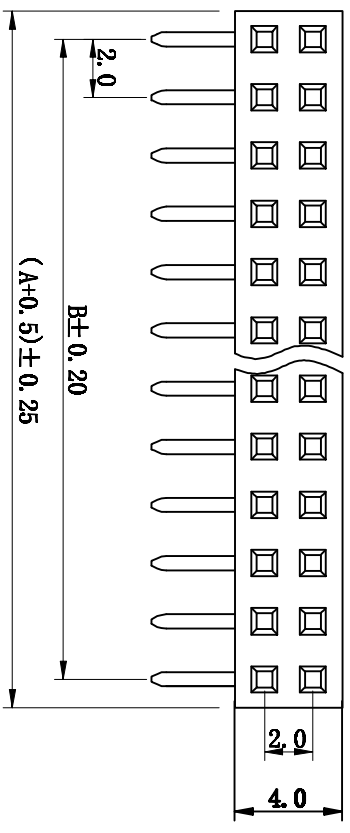

GENERAL TOLERANCE: ±0.60  
 ANGLE TOLERANCE: ±5°

DRAWING TYPE: X  
 CUSTOMER: .X  
 SCALE: .XX  
 SHEET: .XX  
 DRAWING NO.: 1 OF 1

PROJECTION: 2.0mm Dual Row Female Header  
 UNITS: mm  
 SHEET SIZE: A4  
 SERIES: LL1017-4B  
 R/A H=6.35mm

**慈溪蓝翎电子有限公司**  
 CIXI LANLING ELECTRONICS CO., LTD.