

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N 0008	CJJ 11/18/2014	~	


NOTES:

1. SPECIFICATIONS

- . Current Rating: 1A
- . Insulation Resistance: 500MΩ Min
- . Dielectric Withstanding: 300V AC
- . Contact Resistance: 30mΩ Max
- . Operating Temperature: -40°C to +105°C

2. MATERIALS

- . Contact Material: Copper alloy
- . Insulator: Thermoplastic(UL94 V-0)

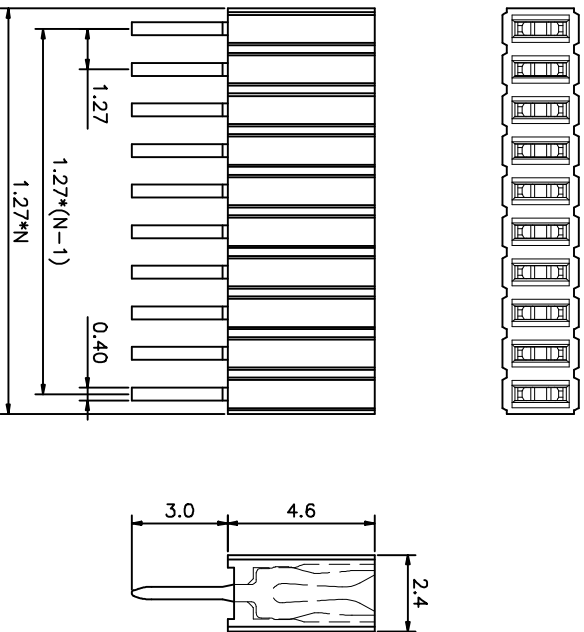

N=No. of Contacts

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X, ±0.60	.X, ±0.38	X, ±5°	.X, ±3°	UNITS	mm	♀	FEMALE HEADER PITCH 1.27mm TYPE
.XX, ±0.25		.XX, ±2°		SHEET SIZE	A4	SERIES	SINGLE ROW STRAIGHT
DRAWING TYPE	CUSTOMER	SCALE	1:1	SHEET	1 OF 1	慈溪蓝翎电子有限公司 CIXI LANLING ELECTRONICS CO., LTD.	
DRAWING NO.							

