
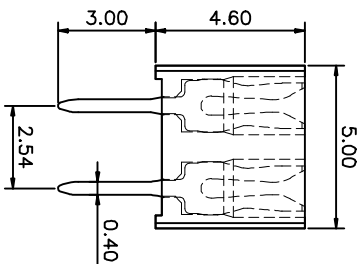
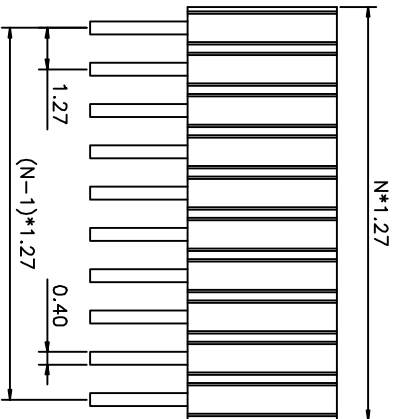


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CUBS	CJJ 11/18/2014	~	

N=No. of contacts/2

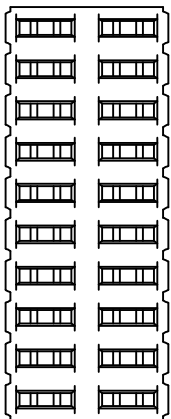

NOTES:

1. SPECIFICATIONS

- . Current Rating: 1A
- . Insulation Resistance: 500MΩ Min
- . Dielectric Withstanding: 300V AC
- . Contact Resistance: 30mΩ Max
- . Operating Temperature: -40°C to +105°C

2. MATERIALS

- . Contact Material: Copper alloy
- . Insulator: thermoplastic(UL94V-0)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X. ±0.60	X. ±5°	mm	FEMALE HEADER PITCH 1.27mm TYPE	⊕	DUAL ROW STRAIGHT
.X ±0.38	.X ±3°	A4	LL1018-2B	mm	
.XX ±0.25	.XX ±2°	SHEET SIZE	SERIES		
DRAWING TYPE		CUSTOMER			
SCALE	1:1	SHEET	1 OF 1		
DRAWING NO.	C				

慈溪蓝翎电子

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.