

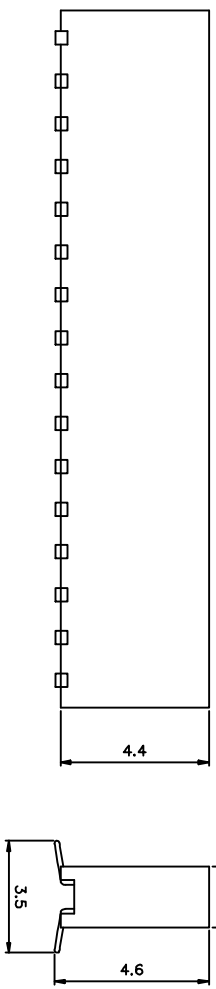


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N QDR	CJJ 11/18/2014	~	

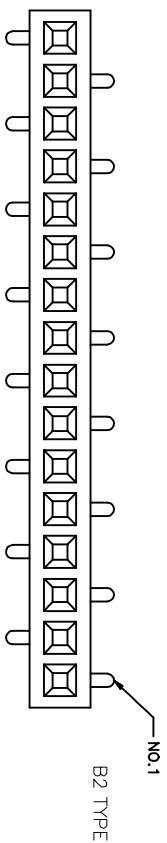

- NOTES:
- SPECIFICATIONS
 - Current Rating: 1A
 - Insulation Resistance: 500M Ω Min
 - Dielectric Withstanding: 300V AC
 - Contact Resistance: 30m Ω Max
 - Operating Temperature: -40°C to +105°C
 - MATERIALS
 - Contact Material: Copper alloy
 - Insulator: Thermoplastic(UL94 V-0)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	± 0.60	X.	$\pm 5^\circ$		FEMALE HEADER PITCH 1.27mm TYPE
.X	± 0.38	.X	$\pm 3^\circ$	mm	SINGLE ROW S.M.T
.XX	± 0.25	.XX	$\pm 2^\circ$	A4	SERIES LL1018-4
DRAWING TYPE		CUSTOMER		 慈溪蓝翎电子有限公司 CIXI LANLING ELECTRONICS CO., LTD.	
SCALE		SHEET			
DRAWING NO.		1 OF 1			

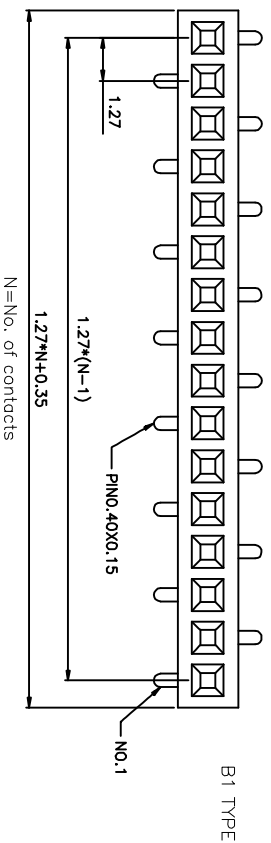