REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	CJJ 11/18/2014	~	

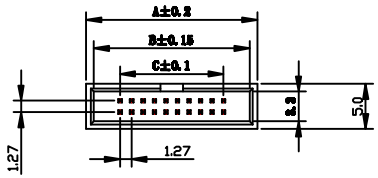











RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)

NOTES:

1. MATERIAL
   1.1 INSULATOR:THERMOPLASTIC(UL 94V-0).
   1.2 CONTACT MATERIAL:COPPER ALLOY.

2. SPECIFICATION
   2.1 CURRENT RATING:1.0 Amp.
   2.2 INSULATION RESISTANCE:1000MΩ Min.
   2.3 DIELECTRIC WITHSTANDING:300VAC.
   2.4 CONTACT RESISTANCE:20mΩ Max.
   2.5 OPERATING TEMPERATURE:-40°C TO+105°C.

3. PRODUCT NUMBER CODE:

LL1008-2 - X X X X X - X

- PLATING LEVEL
  3A: 3A LEVEL
- PACKING TYPE
  A: POLYBAG
  B: TUBE
- HOUSING COLOR
  B:BLACK
- CONTACT PLATING
  8: FULL GOLD FLASH
  6: FULL TIN
- MOUNTING TYPE
  V: STRAIGHT TYPE
- No.OF CONTACTS
  8P 10P 12P 14P 16P 20P 26P 30P 34P
  40P 44P 50P 60P 68P 80P

Position	A	B	C
8P	11.28	9.58	3.81
10P	12.55	10.85	5.08
12P	13.82	12.12	6.35
14P	15.09	13.39	7.62
16P	16.36	14.66	8.89
20P	18.9	17.2	11.43
26P	22.71	21.01	15.24
30P	25.25	23.55	17.78
34P	27.79	26.09	20.32
40P	31.6	29.9	24.13
44P	34.14	32.44	26.67
50P	37.95	36.25	30.48
60P	44.3	42.6	36.83
68P	49.38	47.68	41.91
80P	57	55.3	49.53

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.			

PROJECTION	⊕ -⊲	TITLE	BOX HEADER PITCH 1.27*1.27mm
UNITS	mm		
SHEET SIZE	A4	SERIES	LL1008-2

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO.,LTD.
Tel: 86-574-63519036 Fax: 86-574-63517070