

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2015	~	ZQJ 11/18/2015
B	ADD P/N CODE	CJJ 11/18/2015	~	CJJ 11/18/2015

### 红色IDC母头-DIP型


### 材质 Material

绝缘体 Insulator	Glass Filled PBT UL94V-0
绝缘体 Contactis	Brass/Phosphor Bronze T=0.4
电镀层 Plating	Tin Plated

### 材质 Electrical

接触电阻 Contact Resistance	20mΩ max at DC100mA
绝缘电阻 Insulator Resistance	1000MΩ min at 500V DC
耐压 Withstanding Voltage	500V AC/rms 50Hz for 1 min
工作电流 Current Rating	1 AMP
使用温度范围 Operating Temp	-40℃~+105℃

POS	4	6	8	10	12	14	16	18	20
A	6.96	9.52	12.06	14.6	17.14	19.68	22.22	24.76	27.30
B	3.81	6.35	8.89	11.43	13.97	16.51	19.05	21.59	24.13

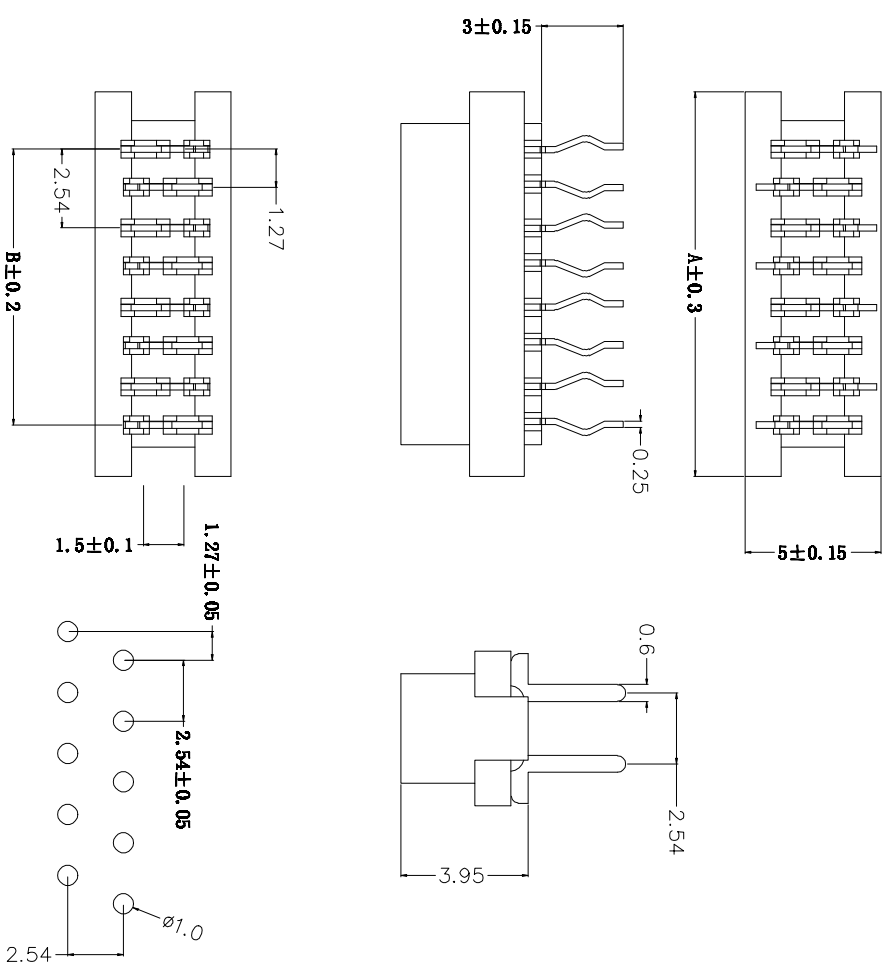

ITEM	CONTACT	HOUSING	PART NAME
1	CONTACT	HOUSING	
2	CONTACT	HOUSING	

GENERAL TOLERANCE	ANGLE TOLERANCE	DRAWING TYPE	CUSTOMER	SCALE	SHEET	OF
X, ±0.60 .X, ±0.38 .XX, ±0.25	X, ±5° .X, ±5° .XX, ±2°	1:1		1:1	1	1

PROJECTION UNITS: mm

SHEET SIZE: A4

SERIES: LL1033-2D

TITLE: Micro Match Connector

LANLING 蓝翎电子

慈溪蓝翎电子有限公司  
CIXI LANLING ELECTRONICS CO., LTD.