

REV	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014		

Table A:

Positions	A	B	C	D
10	17.16	10.16	10.60	7.62
14	22.24	15.24	10.60	7.62
16	24.78	17.78	10.60	7.62
18	27.32	20.32	10.60	7.62
20	29.86	22.86	10.60	7.62
24	34.94	27.94	18.18	15.24
28	40.02	33.02	18.18	15.24
40	55.26	48.26	18.18	15.24

NOTES:

- MATERIAL
 - INSULATOR:THERMOPLASTIC(U 94V-0).
 - CONTACT: COPPER ALLOY.
- SPECIFICATION
 - STORAGE TEMPERATURE:-40~+105°C.
 - CONTACT RESISTANCE:20mΩ max.(initial).
 - INSULATION RESISTANCE:1000MΩ min.
 - DIELECTRIC WITHSTANDING VOLTAGE:AC 500V PER MINUTE.
- PRODUCT NUMBER CODE:
LL1037 - X X X X X X


CONTACT POSITIONS
A: A TYPE
B: B TYPE

CONTACT PLATING
S: SELECTIVE GOLD FLASH
8: FULL GOLD FLASH
2: Gold + Nickel
T: Tin

HOUSING COLOR
B: BLACK

WIDTH
N: 7.62mm
W: 15.24mm

NO. OF CONTACTS
10 14 16 18
20 24 28 40

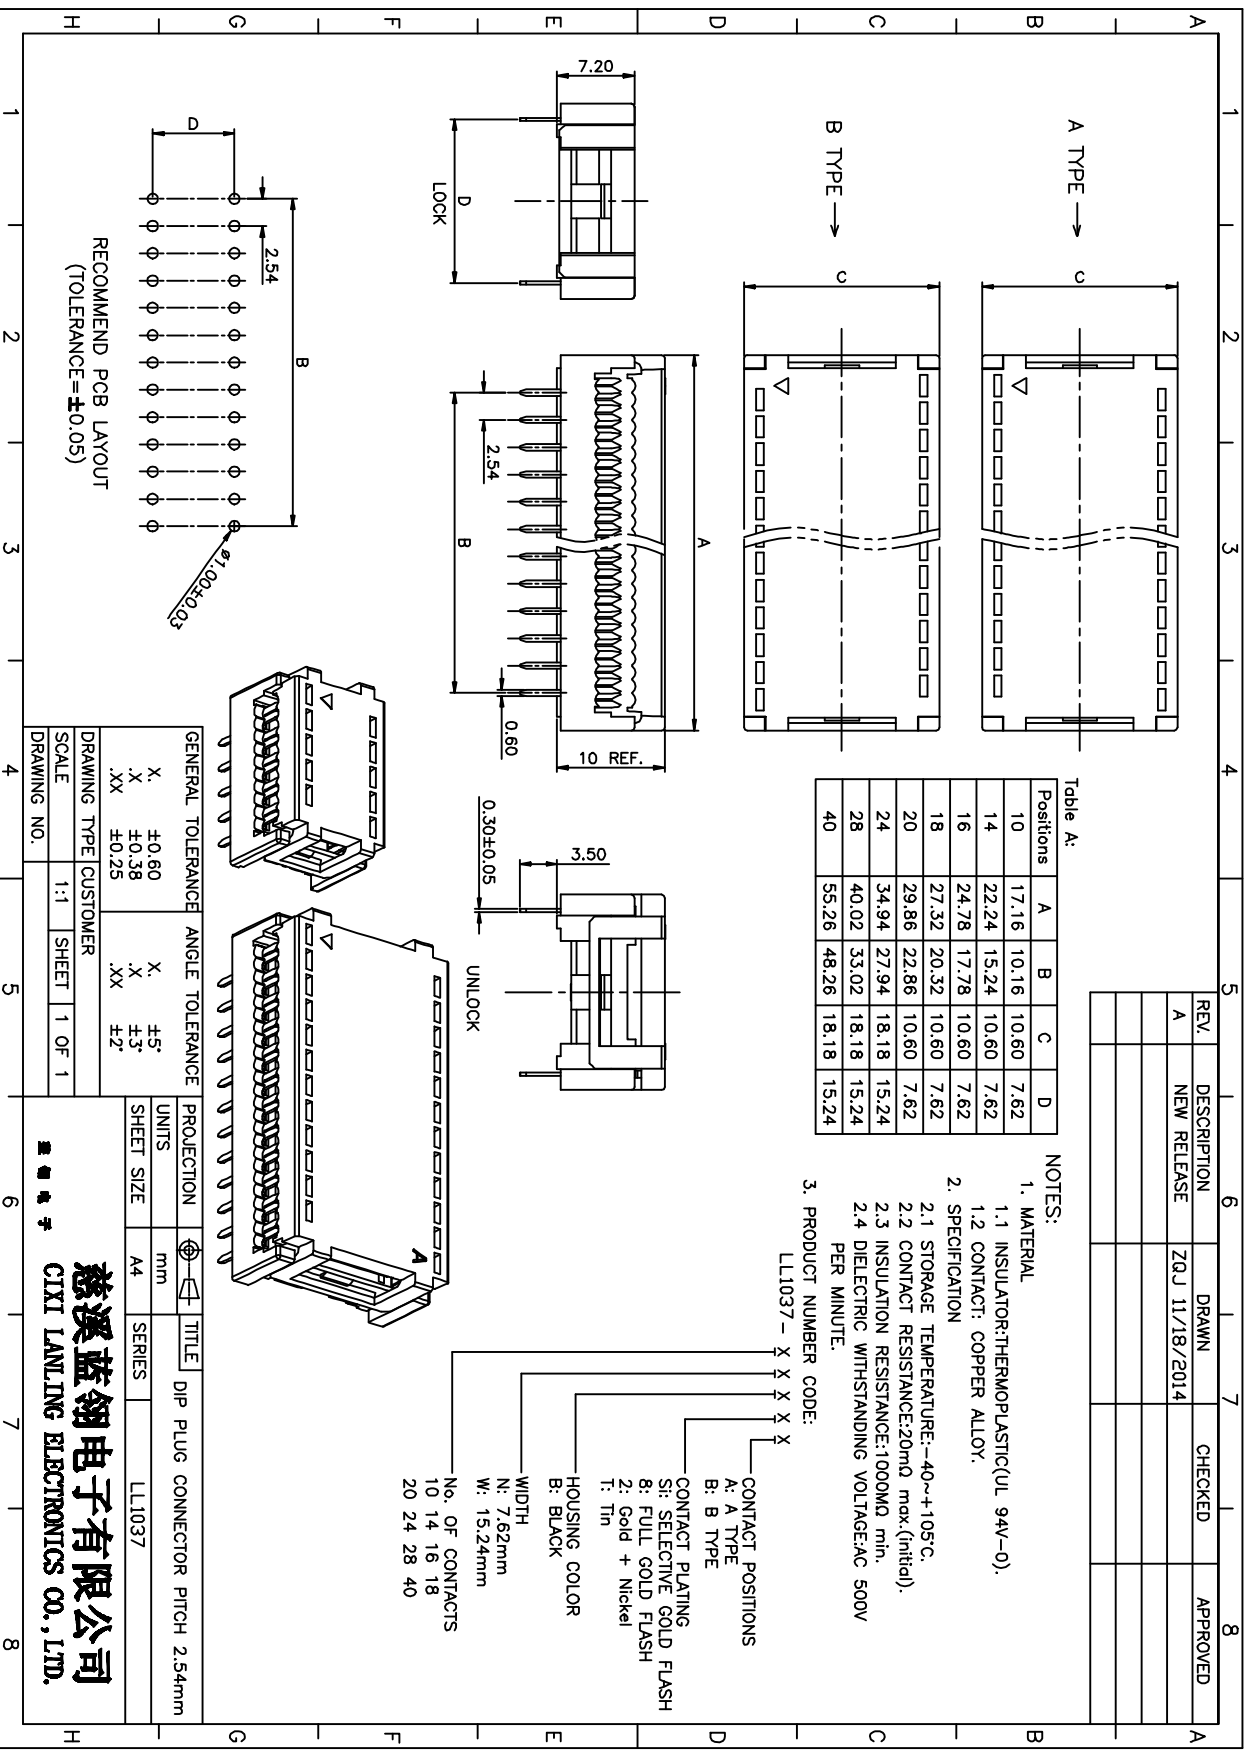

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION
X: ±0.60	X: ±5°	UNITS
.X: ±0.38	.X: ±3°	SHEET SIZE
.XX: ±0.25	.XX: ±2°	A4

DRAWING TYPE	CUSTOMER	SCALE	SHEET	1 OF 1
DRAWING NO.	1:1	SHEET	1 OF 1	

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.

TITLE: DIP PLUG CONNECTOR PITCH 2.54mm
SERIES: LL1037