
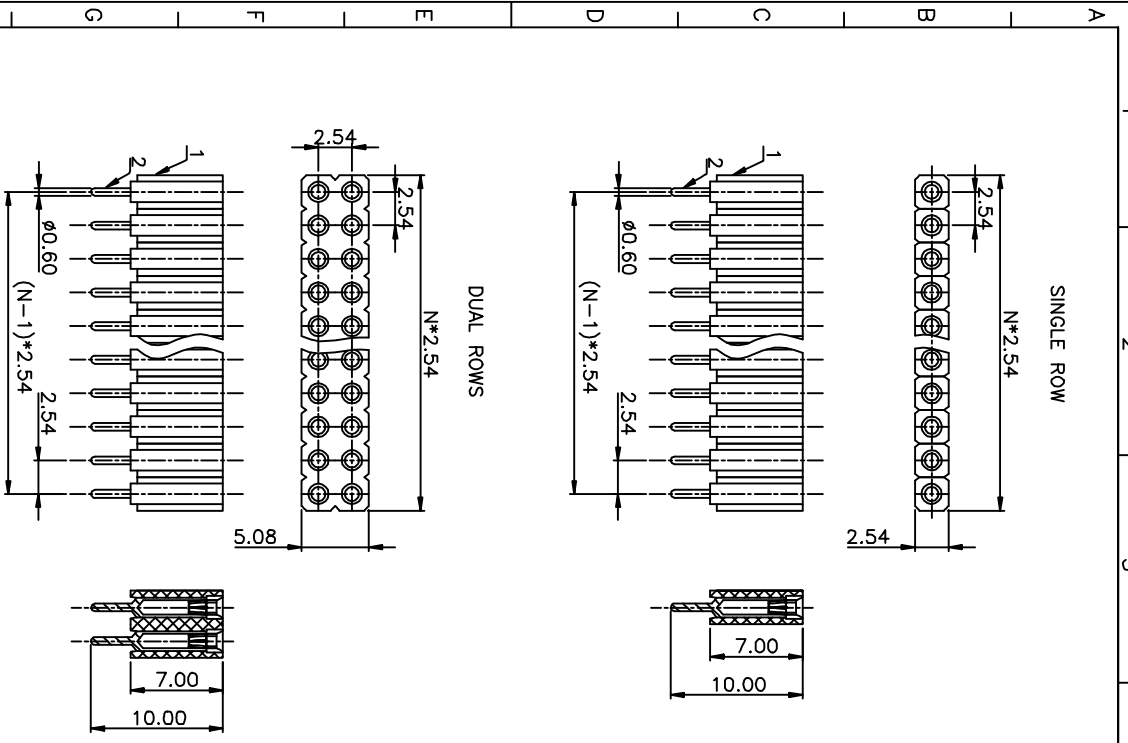


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014		
B	ADD P/N CODE	CJJ 11/18/2014		

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE: -40°C~+105°C.

3. PRODUCT NUMBER CODE:

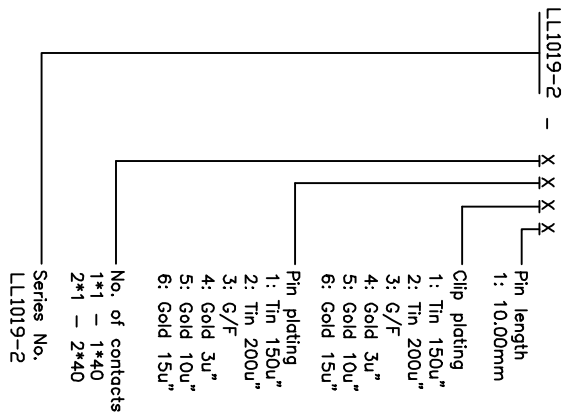

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION
X. ±0.60	X. ±5°	UNITS mm
.X ±0.38	.X ±3°	SHEET SIZE A4
.XX ±0.25	.XX ±2°	SERIES LL1019-2

TITLE	PROJECTION
H:7.00mm SIP IC SOCKET (MACHINE PIN) PITCH 2.54mm	mm

ITEM	PART NAME	PART NO.	MATERIALS	SCALE	DRAWING NO.	DRAWING TYPE	CUSTOMER	FINISHED
1	HOUSING		THERMOPLASTIC	1:1		DRAWING	UL 94 V-0	10F1
2	CONTACT		COPPER ALLOY				GOLD PLATED	

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.