
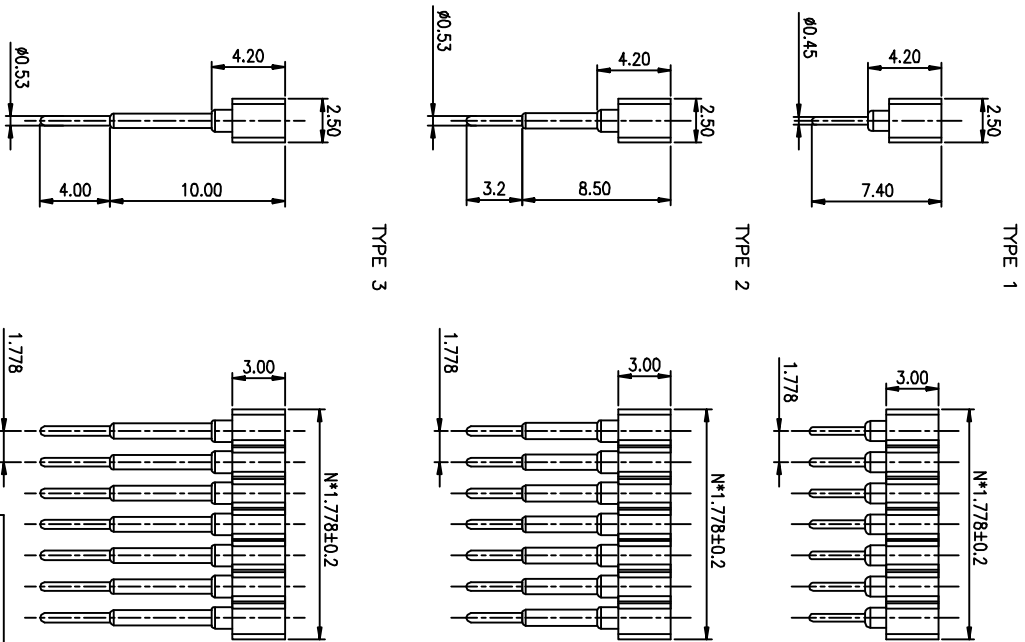


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014		
B	<b>ADD P/N CODE</b>	CJJ 11/18/2014		

NOTES:

- ELECTRICAL CHARACTERISTICS:
  - CONTACT RESISTANCE: 20mΩ Max.
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
  - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
  - TEMPERATURE: 0°C~+85°C.
- PRODUCT NUMBER CODE:  
LL1019-11 - X X X X X

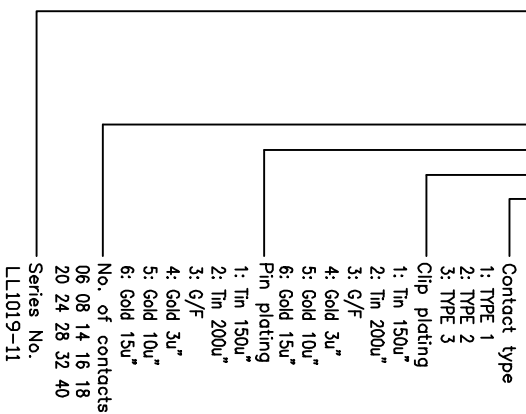

GENERAL TOLERANCE	ANGLE TOLERANCE
X, ±0.60	X, ±5°
.X, ±0.38	.X, ±3°
.XX, ±0.25	.XX, ±2°

PROJECTION	TITLE
UNITS: mm	SIP IC SOCKET PITCH 1.778mm
SHEET SIZE: A4	SERIES: LL1019-11

ITEM	PART NAME	PART NO.	MATERIALS	FINISHED	DRAWING NO.	SCALE	CUSTOMER	SHEET	1 OF 1
2	CONTACT		COPPER ALLOY						
1	HOUSING		THERMOPLASTIC		UL 94 V-0				
1	PART NAME								
1	PART NO.								
1	PART NAME								

慈溪蓝翎电子有限公司  
CIXI LANLING ELECTRONICS CO., LTD.