



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	

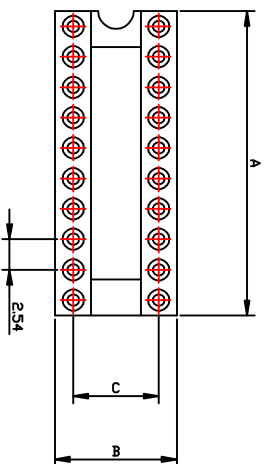

Position	A	B	C
6P	7.6	10.16	7.62
8P	10.16	10.16	7.62
10P	12.6	10.16	7.62
12P	15.2	10.16	7.62
14P	17.78	10.16	7.62
16P	20.32	10.16	7.62
18P	22.86	10.16	7.62
20P	25.4	10.16	7.62
24P N	30.48	10.16	7.62
28P N	35.56	10.16	7.62
24P V	30.48	17.78	15.24
28P V	35.56	17.78	15.24
32P	40.64	17.78	15.24
40P	50.8	17.78	15.24
42P	53.34	17.78	15.24
48P	60.96	17.78	15.24
50P	63.5	17.78	15.24

Technical Data
 Insulator:Black glass filled polyester
 Flammability:UL 94V-0
 Sleeve:Brass CuZn36Pb3
 Contacts Clip(4Finger):Beryllium copper
 Kating pin:Φ0.40 to 0.56mm
 Forcees:(polished steel gauge Φ0.45)
 Mechanical life:min 500 cycles
 Current rating:3amps/contact mass
 Contact resistance:max 10MΩ
 Dielectric strength:min 1000Vrms
 Plating:Gold plated/Tin plated
 Operating temperature:-55℃~+105℃
 Soldering temperature:+245℃±5℃, 5s max

GENERAL TOLERANCE	ANGLE TOLERANCE
X, ±0.60	X, ±5°
X, ±0.38	X, ±3°
.XX, ±0.25	.XX, ±2°

DRAWING TYPE	CUSTOMER
SCALE	1:1
DRAWING NO.	SHEET 10F-1

PROJECTION	TITLE
UNITS	DIP IC SOCKET PITCH 2.54mm
SHEET SIZE	PIN LENGTH=4.82
A4	LL1021-2
SERIES	

慈溪蓝翎电子有限公司
 CIXI LANLING ELECTRONICS CO., LTD.
 Tel: 86-574-65919058 Fax: 86-574-65917070