

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014		
B	ADD P/N CODE	CJJ 11/18/2014		

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - 1.1 CONTACT RESISTANCE: 20mΩ Max.
 - 1.2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - 1.3 INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - 2.1 TEMPERATURE: -40°C~+105°C.

3. PRODUCT NUMBER CODE:

LL1021-4 - X X X X X

Pin length
F: 4.20mm

Clip plating

1: Tin 150u"

2: Tin 200u"

3: 6/F

4: Gold 3u"

5: Gold 10u"

6: Gold 15u"

Pin plating

1: Tin 150u"

2: Tin 200u"

3: 6/F

4: Gold 3u"




5: Gold 10u"

6: Gold 15u"

Width(DIM C)
N: 7.62mm
W: 15.24mm

No. of contacts
06 08 14 16 18
20 24 28 32 40

Series No.
LL1021-4

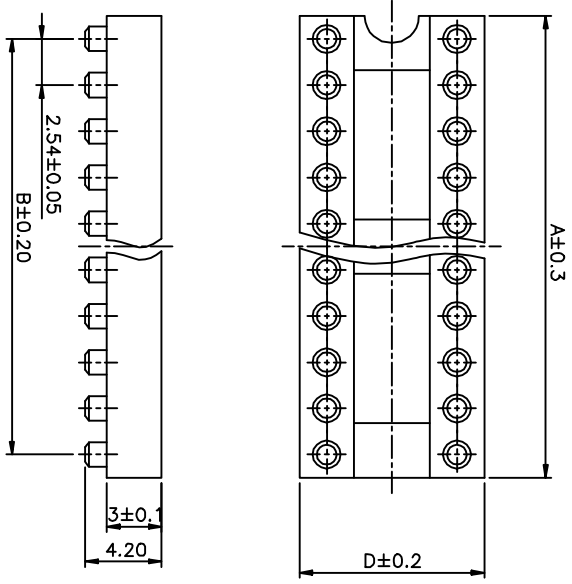

Position	Dimension			
	A	B	C	D
06	7.62	5.08	7.62	10.16
08	10.16	7.62	7.62	10.16
14	17.78	15.24	7.62	10.16
16	20.32	17.78	7.62	10.16
18	22.86	20.32	7.62	10.16
20	25.40	22.86	7.62	10.16
24	30.48	27.94	7.62	10.16
28	35.56	33.02	7.62	10.16
24	30.48	27.94	15.24	17.78
28	35.56	33.02	15.24	17.78
32	40.64	38.10	15.24	17.78
40	51.00	48.26	15.24	17.78

GENERAL TOLERANCE ANGLE TOLERANCE

X	±0.60	X	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE CUSTOMER

SCALE	1:1	SHEET	1 OF 1
DRAWING NO.			

PROJECTION	TITLE
UNITS: mm	DIP IC SOCKET PITCH 2.54mm
SHEET SIZE: A4	LL1021-4

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.

ITEM	PART NAME	PART NO.	MATERIALS
1	HOUSING		THERMOPLASTIC
2	CONTACT		COPPER ALLOY

FINISHED	FINISHED
UL 94 V-0	GOLD PLATED

CONTACT	HOUSING
COPPER ALLOY	THERMOPLASTIC

FINISHED	FINISHED
UL 94 V-0	GOLD PLATED

SCALE	1:1	SHEET	1 OF 1
DRAWING NO.			

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.