

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	✓	
B	ADD P/N CODE	CJJ 11/18/2014		

NOTES:

- MATERIAL
 - INSULATOR:POLYESTER(UL 94V-0).
 - CONTACT: BRASS.
 - FINISH:TIN PLATED.
- SPECIFICATION
 - CURRENT RATING: 1.0A/pin max.
 - VOLTAGE RATING: 60V AV/DC.
 - CONTACT RESISTANCE: 20mΩ max.
 - INSULATION RESISTANCE: 1000MΩ min.
 - WITHSTANDING VOLTAGE: 500V AC/minute.
 - TEMPERATURE RANGE: -45°C to +105°C.


3. PRODUCT NUMBER CODE:

LL1021-5 - X X X X X X X X

- X: GENERAL SUPPORT
- S: W/ CENTRAL SUPPORT
- X: W/o CENTRAL SUPPORT
- CLIP PLATING
- F6: 3u" Gold
- T1: Tin
- HOUSING MATERIAL
- S: PBT
- WIDTH(DIM D)
- N: 7.62mm(06-24P)
- W: 15.24mm(24-40P)
- X: 1*40&2*40 only
- PIN PLATING
- T1: Tin
- CLIP TYPE
- B: 4 FINGERS
- No. OF CONTACTS
- 06 08 14 16 18
- 20 24 28 32 40

Position	A±0.5	B±0.2	C±0.3	D±0.2
06	7.62	5.08	10.16	7.62
08	10.16	7.62	10.16	7.62
14	17.78	15.24	10.16	7.62
16	20.32	17.78	10.16	7.62
18	22.86	20.34	10.16	7.62
20	25.40	22.86	10.16	7.62
24	30.48	27.94	10.16	7.62
28	35.56	33.02	10.16	7.62
24	30.48	27.94	17.78	15.24
28	35.56	33.02	17.78	15.24
32	40.64	38.10	17.78	15.24
40	50.80	48.26	17.78	15.24

Dimension

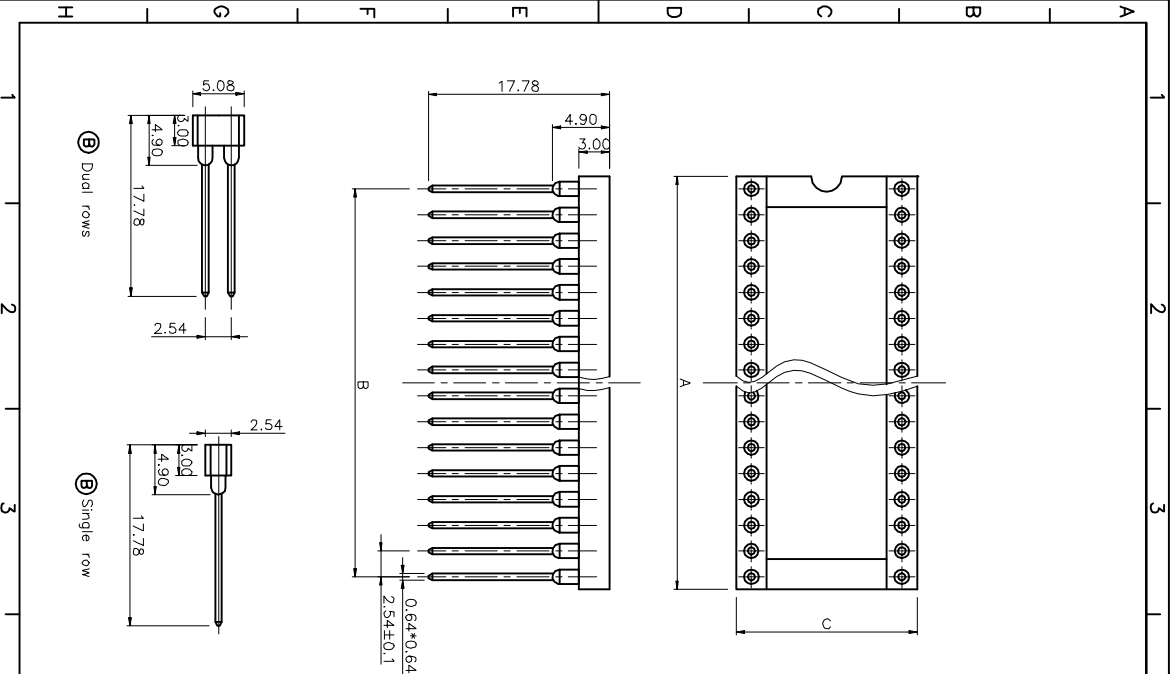

GENERAL TOLERANCE	ANGLE TOLERANCE	TOLERANCE
X, ±0.60	X, ±5°	±5°
.X, ±0.38	.X, ±3°	±3°
.XX, ±0.25	.XX, ±2°	±2°

PROTECTION	UNITS	TITLE	DIP IC SOCKET WIRE WRAP TYPE
SHEET SIZE	mm	STANDARD 17.78mm LENGTH	
SCALE	1:1	SHEET	10F1
DRAWING TYPE	CUSTOMER		
DRAWING NO.			

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.