


REV	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014		
B	ADD P/N CODE	CJJ 11/18/2014		


NOTES:

- ELECTRICAL CHARACTERISTICS:
 - 1.1 CONTACT RESISTANCE: 20mΩ Max.
 - 1.2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - 1.3 INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - 2.1 TEMPERATURE: -40°C~+105°C.

3. PRODUCT NUMBER CODE:

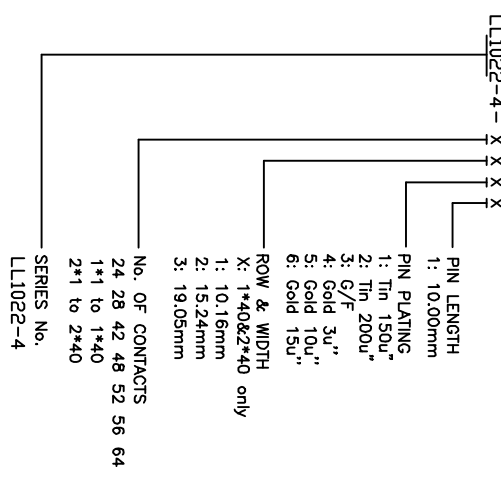

Position	Dimension			
	A	B	C	D
24	21.46	19.56	12.65	10.16
28	25.01	23.11	12.65	10.16
42	37.46	35.56	17.73	15.24
48	42.79	40.89	17.73	15.24
52	46.35	44.45	17.73	15.24
56	49.91	48.01	17.73	15.24
64	57.04	55.12	21.54	19.05

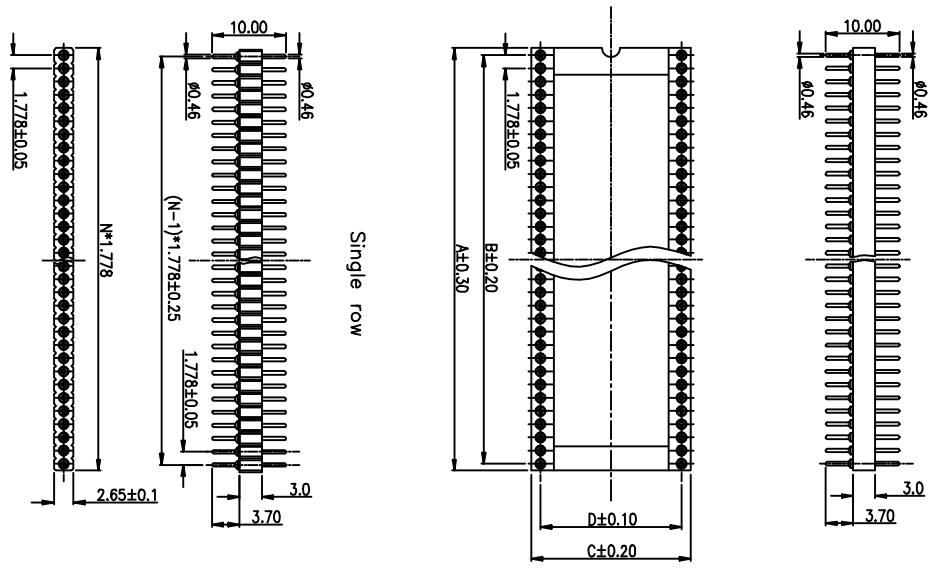

GENERAL TOLERANCE	ANGLE TOLERANCE
X, ± 0.50	X, $\pm 5^\circ$
X, ± 0.38	X, $\pm 3^\circ$
XX, ± 0.25	XX, $\pm 2^\circ$

PROJECTION	TITLE
UNITS: mm	MACHINE PIN HEADER IC DIP PITCH 1.778mm
SHEET SIZE: A4	SERIES: L11022-4

ITEM	PART NAME	PART NO.	MATERIALS	FINISHED	DRAWING TYPE	CUSTOMER	SHEET	1 OF 1
2	CONTACT		COPPER ALLOY		GOLD PLATED			
1	HOUSING		THERMOPLASTIC		UL 94 V-0			
1	PART NAME							

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.