



Dimension	A±0.2	B±0.2	C±0.3	D
Position 9	17.90	24.99	30.80	16.33
15	26.50	33.32	39.14	24.66
25	40.00	47.04	53.04	38.38
37	56.50	63.50	69.32	54.84

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	UNITS	TITLE
X ±0.60	X ±5°	⊕	mm	D-SUB STANDARD SOLDER TYPE
X ±0.38	X ±3°	□	A4	LL1045-1
.XX ±0.25	.XX ±2°	○	Series	
DRAWING TYPE CUSTOMER	SCALE 1:1	SHEET 1 OF 1		
DRAWING NO.				

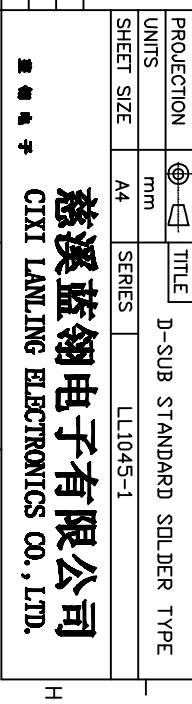

- NOTES:
- ELECTRICAL CHARACTERISTICS:
    - 1.1 CONTACT RESISTANCE: 20mΩ Max. INITIAL.
    - 1.2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
    - 1.3 INSULATION RESISTANCE: 1000MΩ Min.
  - ENVIRONMENT CHARACTERISTICS:
    - 2.1 TEMPERATURE RANGE: -40°C~+105°C.
  - PRODUCT NUMBER CODE:
    - LL1045-1 X
- CONTACT TYPE ⊕  
 JY: JY TYPE  
 CT: CT TYPE
- SCREW DIM. A  
 S: Standard(W/O nut)  
 1: 5.00  
 2: 3.00  
 3: 5.20  
 4: 4.80  
 5: 5.80  
 6: 4.00
- SCREW TYPE  
 S: Standard(W/O nut)  
 1: CC TYPE  
 2: CS TYPE  
 3: CSH TYPE
- CONTACT PLATING  
 8: FULL GOLD FLASH  
 S1: SELECTIVE GOLD FLASH  
 6: Full Tin
- SHELL PLATING  
 T: FRONT & BACK Tin  
 N: FRONT Nickel,BACK Tin
- HOUSING COLOR  
 B: BLACK  
 W: WHITE  
 U: BLUE
- CONNECTOR TYPE  
 M: Male  
 F: Female
- No. OF CONTACTS  
 D9, 15, 25, 37, 50

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	CJJ 11/18/2014
B	ADD 50pin drawing	ZQJ 11/18/2014	~	CJJ 11/18/2014
C	ADD BR TYPE	CJJ 11/18/2014	~	CJJ 11/18/2014
D	REDRAWING	CJJ 11/18/2014	~	CJJ 11/18/2014
E	ADD P/N CODE	CJJ 11/18/2014	~	CJJ 11/18/2014

慈溪蓝翎电子有限公司  
 CIXI LANLING ELECTRONICS CO., LTD.