


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2015	~	ZQJ 11/18/2015
B	ADD P/N CODE	CJJ 11/18/2015	~	CJJ 11/18/2015

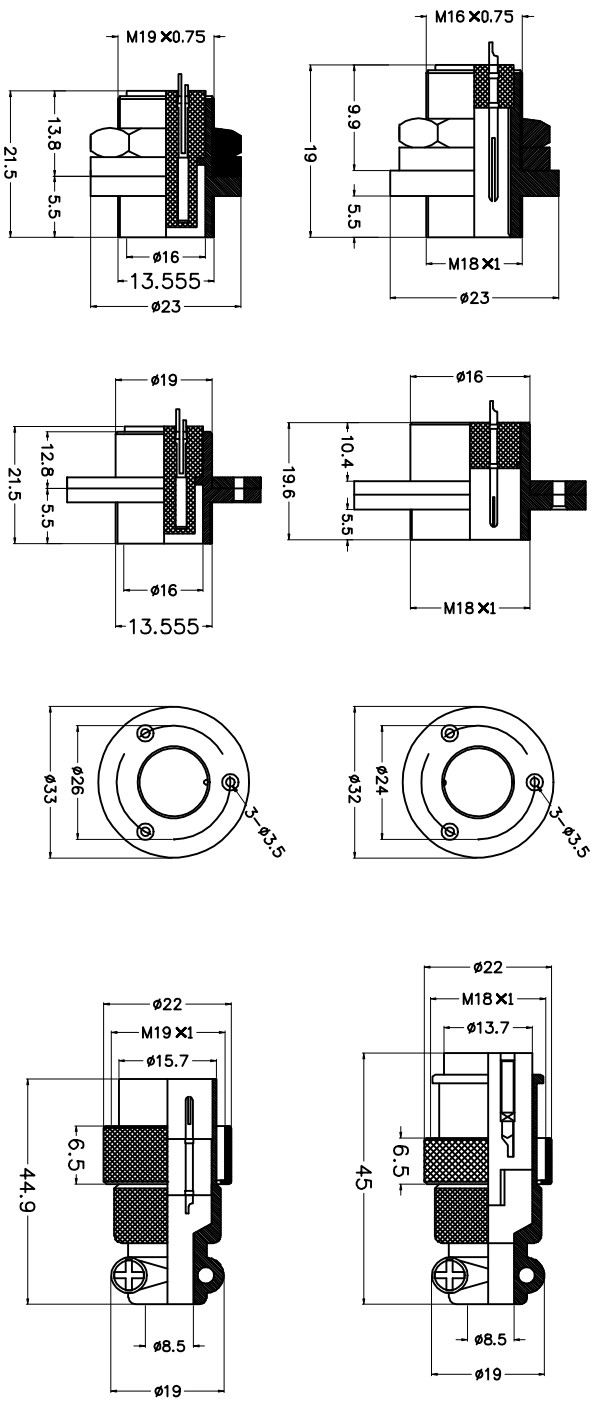

DF18A 系列 (正装, 反装) 2T-8T

系列代号 Serial Code	DF18-2	DF18-3	DF18-4	DF18-5	DF18-6	DF18-7	DF18-8
插孔数/极数 Contact Terminals/ Polarity Connections	2	3	4	5	6	7	8
插孔间距/极距 Contact Pitch/spacing	7L-180W	7L-180W	7L-180W	7L-180W	7L-180W	7L-180W	7L-180W
工作电压 (AC/1) 4kV Operational Volt. with/without AC (1 min)	250	250	250	250	250	250	250
额定电压 (AC/1) 1kV Rated Voltage (AC/1) 1kV/1min	1500	1500	1500	1500	1500	1500	1500
额定电压 (DC) 100V Rated Voltage (DC) 100V/1min	1500	1500	1500	1500	1500	1500	1500
额定电压 (DC) 50V Rated Voltage (DC) 50V/1min	10	10	10	10	10	10	10
插孔直径 Ø (mm) Solder Pad Diameter	2.95	2.95	2.95	2	1.5	1.5	1.5

GENERAL TOLERANCE	ANGLE TOLERANCE
X, ±0.60	X, ±5°
.X, ±0.38	.X, ±3°
.XX, ±0.25	.XX, ±2°

PROJECTION	TITLE
UNITS: mm	DF18A Micro Jack Connector
SHEET SIZE: A4	SERIES: DF18A 珠 底座

ITEM	PART NAME	SCALE	DRAWING NO.	CUSTOMER	SHEET	1 OF 1
2	CONTACT	1:1				
1	HOUSING					
1	PART NAME					

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.