


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2015	~	ZQJ 11/18/2015
B	ADD P/N CODE	CJJ 11/18/2015	~	CJJ 11/18/2015

DF20 A,B 系列 2T-15T

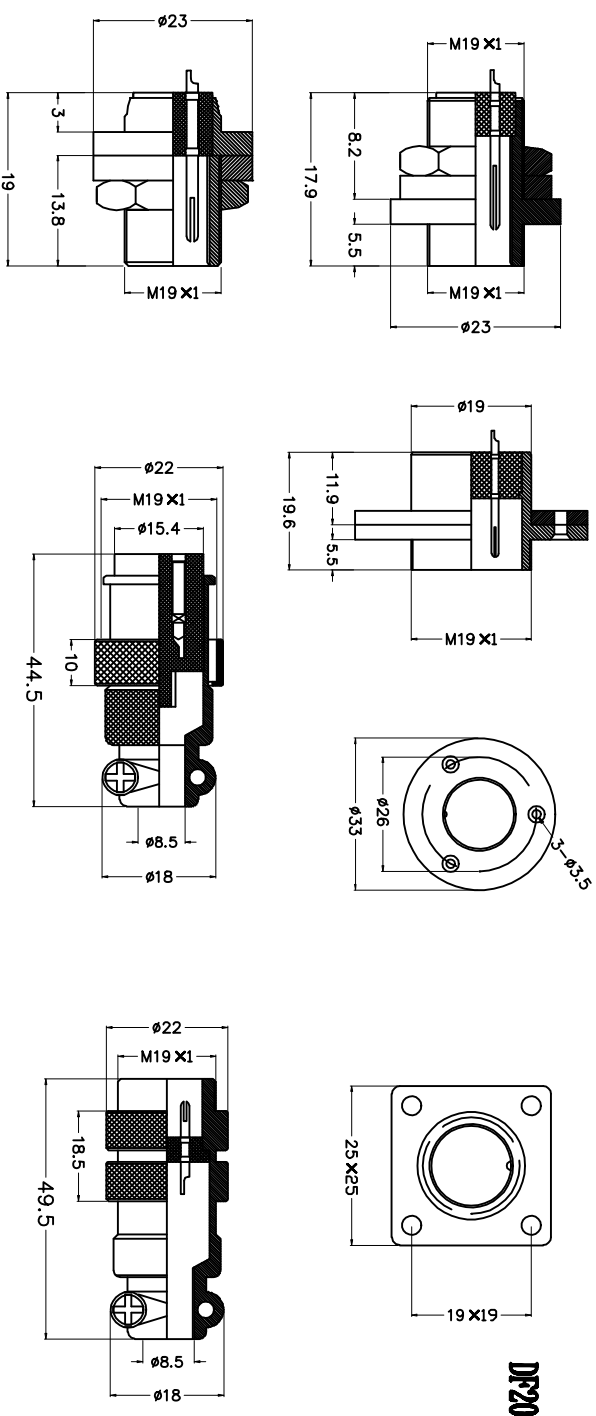

系列/料号	DF20-2	DF20-3	DF20-4	DF20-5	DF20-6	DF20-7	DF20-8	DF20-9	DF20-10	DF20-11	DF20-12	DF20-14	DF20-15
系列/料号 DF20-2	DF20-2	DF20-3	DF20-4	DF20-5	DF20-6	DF20-7	DF20-8	DF20-9	DF20-10	DF20-11	DF20-12	DF20-14	DF20-15
插孔数 (孔数)	2	3	4	5	6	7	8	9	10	11	12	14	15
插孔间距 (mm)	2.54	2.54	2.54	2.54	2.54	2.54	2.54	2.54	2.54	2.54	2.54	2.54	2.54
插孔直径 (mm)	0.40	0.40	0.40	0.40	0.40	0.40	0.40	0.40	0.40	0.40	0.40	0.40	0.40
插孔深度 (mm)	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50
插孔公差 (mm)	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05
插孔位置公差 (mm)	±0.10	±0.10	±0.10	±0.10	±0.10	±0.10	±0.10	±0.10	±0.10	±0.10	±0.10	±0.10	±0.10
插孔垂直度公差 (mm)	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05
插孔平行度公差 (mm)	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05
插孔同心度公差 (mm)	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05
插孔圆跳动公差 (mm)	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05

GENERAL TOLERANCE		ANGLE TOLERANCE	
X	±0.60	X	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER
SCALE	1:1
DRAWING NO.	SHEET
	1 OF 1

PROJECTION	TITLE
UNITS	DF20 A,B Micro Jack Connector
SHEET SIZE	A4
SERIES	DF20 A,B

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.

2	CONTACT
1	HOUSING
ITEM	PART NAME