


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2015	~	ZRQJ 11/18/2015
B	ADD P/N CODE	CJJ 11/18/2015	~	CJJ 11/18/2015

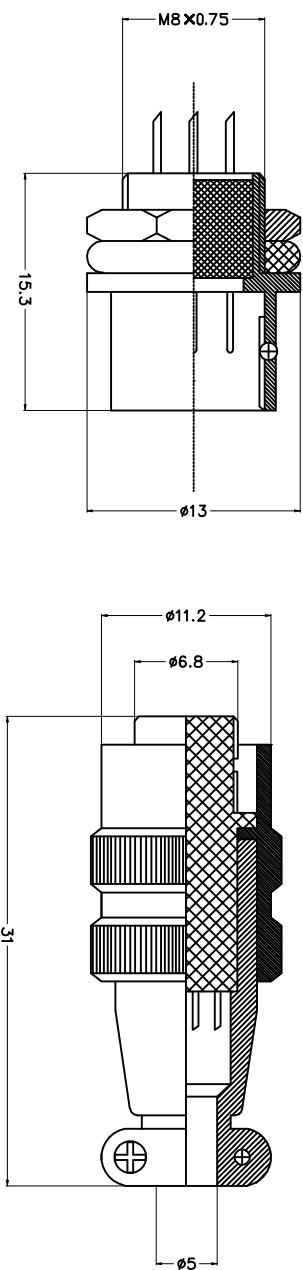

材料 Shell size	IS9-2 正裝	IS9-3 正裝	IS9-4 正裝
插孔數目 Contact arrangement on shell including front and rear contacts			
線序 Circuit wiring/relays	3A	3A	3A
殼體尺寸 Physical envelope	IS9-2 正裝	IS9-3 正裝	IS9-4 正裝
插孔尺寸 Pin/Contact dimensions	IS 2.00 ± 0.05	IS 2.00 ± 0.05	IS 2.00 ± 0.05
殼體厚度 Shell thickness	IS 0.10 ± 0.02	IS 0.10 ± 0.02	IS 0.10 ± 0.02
插孔間距 Pitch (mm)	1	1	1

XS8 系列 2T-4T

GENERAL TOLERANCE	ANGLE TOLERANCE
X ±0.60	X ±5°
.X ±0.38	.X ±3°
.XX ±0.25	.XX ±2°

PROJECTION	TITLE
UNITS mm	XS8 Micro Jack Connector
SHEET SIZE A4	SERIES XS8

ITEM	PART NAME
2	CONTACT
1	HOUSING

DRAWING TYPE	CUSTOMER
SCALE 1:1	SHEET 1 OF 1
DRAWING NO.	


慈溪蓝翎电子有限公司
 CIXI LANLING ELECTRONICS CO., LTD.