
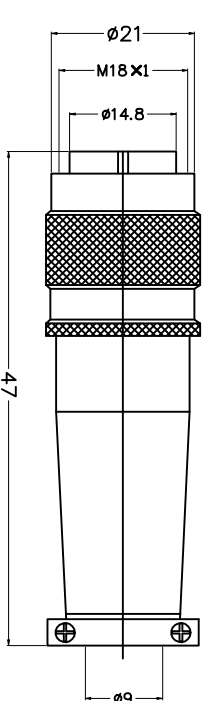


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2015	~	ZQJ 11/18/2015
B	ADD P/N CODE	CJJ 11/18/2015	~	CJJ 11/18/2015

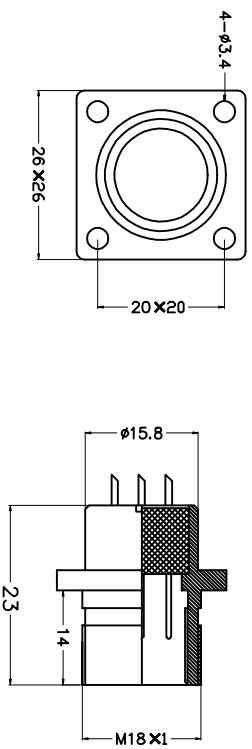

XS16 系列 21-71

材料 Shell size	XS16-2	XS16-3	XS16-4	XS16-5	XS16-6	XS16-7	XS16-9
插孔间距 Contact Spacing on pitch according to standard IEC 60320	2.54	2.54	2.54	2.54	2.54	2.54	2.54
插孔数/孔位 Contact Position/Position	4	4	4	4	4	4	4
插孔间距/孔位 Contact Position/Position	4	4	4	4	4	4	4
插孔间距/孔位 Contact Position/Position	4	4	4	4	4	4	4
插孔间距/孔位 Contact Position/Position	4	4	4	4	4	4	4
插孔间距/孔位 Contact Position/Position	4	4	4	4	4	4	4
插孔间距/孔位 Contact Position/Position	4	4	4	4	4	4	4

2	CONTACT			
1	HOUSING			
ITEM	PART NAME			

GENERAL TOLERANCE	ANGLE TOLERANCE
X, ±0.60	X, ±5°
.X, ±0.38	.X, ±3°
.XX, ±0.25	.XX, ±2°

DRAWING TYPE	CUSTOMER
SCALE	SHEET
DRAWING NO.	1 OF 1

PROJECTION	TITLE
UNITS	XS16 Micro Jack Connector
SHEET SIZE	A4
SHEET SIZE	SERIES
	XS16 (401)


慈溪蓝翎电子有限公司
 CIXI LANLING ELECTRONICS CO., LTD.