



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2015	~	ZQJ 11/18/2015
B	ADD P/N CODE	CJJ 11/18/2015	~	CJJ 11/18/2015

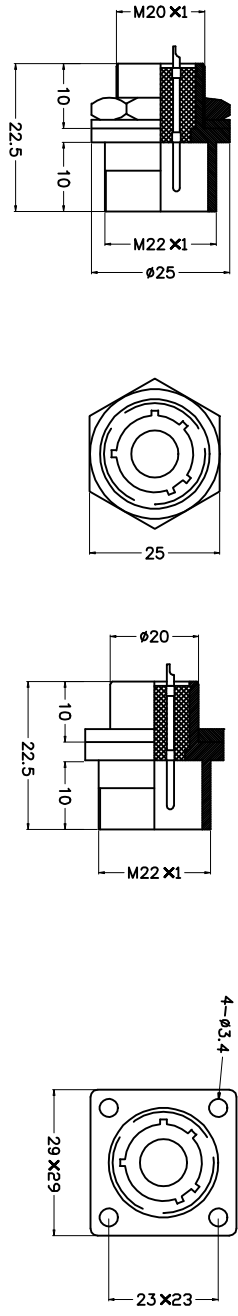

PLS20 系列 2T-14T

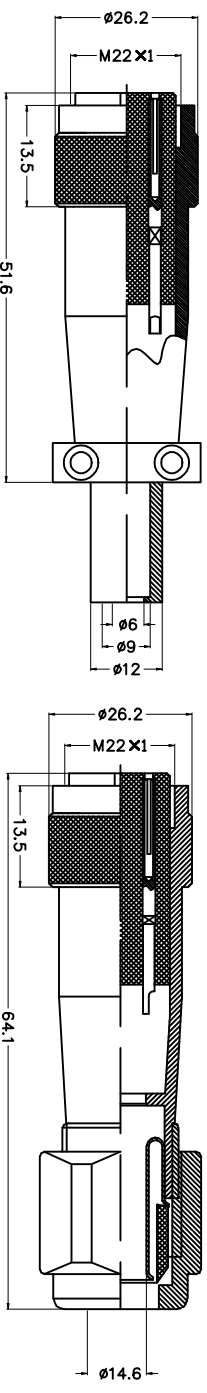

系列/壳位	壳位	PLS20-2	PLS20-3	PLS20-4	PLS20-4	PLS20-5	PLS20-7	PLS20-8	PLS20-10	PLS20-12	PLS20-14
插孔数/壳位	Current rating/voltage	12A-250V	12A-250V	12A-250V	7A-150V	7A-150V	6A-150V	6A-150V	6A-150V	6A-150V	6A-150V
插孔间距 (壳位) 壳位间距 (壳位)	插孔间距 (壳位) 壳位间距 (壳位)	250	250	250	200	200	200	200	200	200	200
插孔间距 (壳位) 壳位间距 (壳位)	插孔间距 (壳位) 壳位间距 (壳位)	1500	1500	1500	1500	1500	1500	1500	1500	1500	1500
插孔间距 (壳位) 壳位间距 (壳位)	插孔间距 (壳位) 壳位间距 (壳位)	2000	2000	2000	2000	2000	1500	1500	1000	1000	1000
插孔间距 (壳位) 壳位间距 (壳位)	插孔间距 (壳位) 壳位间距 (壳位)	10	10	10	10	10	10	10	10	10	10
插孔间距 (壳位) 壳位间距 (壳位)	插孔间距 (壳位) 壳位间距 (壳位)	2	2	2	1.7	1.7	1.7	1.7	1	1	1
插孔间距 (壳位) 壳位间距 (壳位)	插孔间距 (壳位) 壳位间距 (壳位)	2.5	2.5	2.5	1.6	1.6	1.6	1.6	1	1	1

GENERAL TOLERANCE
X, ±0.60
.X, ±0.38
.XX, ±0.25

ANGLE TOLERANCE
X, ±5°
.X, ±3°
.XX, ±2°

PROJECTION
UNITS: mm
SHEET SIZE: A4
SERIES: PLS20
TITLE: PLS20 Micro Jack Connector

2	CONTACT		DRAWING TYPE	CUSTOMER	SCALE	1:1	SHEET	1 OF 1
1	HOUSING		DRAWING NO.					
1	PART NAME							

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.