



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2015	~	ZQJ 11/18/2015
B	ADD P/N CODE	CJJ 11/18/2015	~	CJJ 11/18/2015

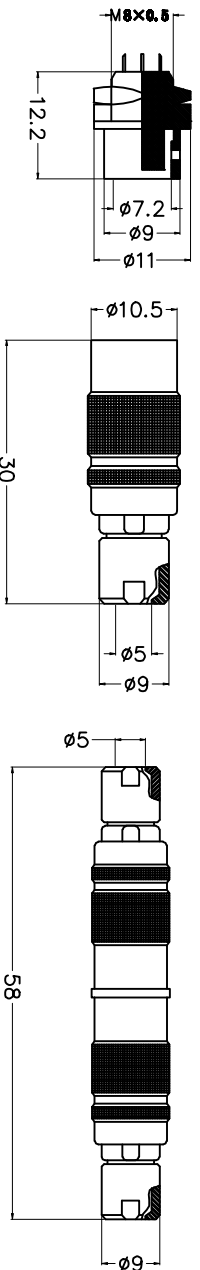

YC8-A, B, C, D, 型卡扣式的2T-7T

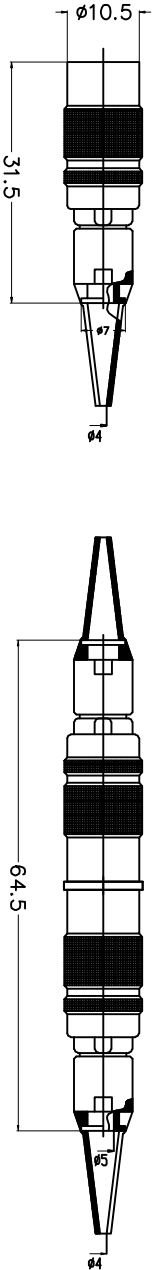

外形尺寸 Shell size	YC8-2	YC8-3	YC8-4	YC8-5	YC8-6	YC8-7
插针间距, 插针间距公差 Pitch Arrangement Pitch Arrangement for panel hole diameter	正装 反装	正装 反装	正装 反装	正装 反装	正装 反装	正装 反装
额定电流 Current rating	2 A	2 A	2 A	2 A	2 A	2 A
接触焊孔直径 ϕ (mm) Solder filler diameter	ϕ 0.5	ϕ 0.5	ϕ 0.5	ϕ 0.5	ϕ 0.5	ϕ 0.5

GENERAL TOLERANCE	ANGLE TOLERANCE
X: ± 0.60	X: $\pm 5^\circ$
.X: ± 0.38	.X: $\pm 3^\circ$
.XX: ± 0.25	.XX: $\pm 2^\circ$

PROJECTION	TITLE
UNITS: mm	YC8 Micro Jack Connector
SHEET SIZE: A4	SERIES: YC8 A B C D type

2	CONTACT
1	HOUSING
ITEM	PART NAME

DRAWING TYPE	CUSTOMER
SCALE	SHEET
DRAWING NO.	1 OF 1



慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.