


REV	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2015	~	ZQJ 11/18/2015
B	ADD P/N CODE	CJJ 11/18/2015	~	CJJ 11/18/2015

材质 Material

绝缘体 Insulator	Glass Filled PBT UL94V-0 Black
接触件 Contacts	Brass/Phosphor Bronze
电镀层 Plating	Contact Gold and Dip Tin over Nickel

电气性能 Electrical Characteristics

接触电阻 Contact Resistance	30mΩ max. at DC100mA
绝缘电阻 Insulator Resistance	1000MΩ min. at 500V DC
耐压 Withstanding Voltage	1000V AC/rms 50Hz for 1 min
工作电流 Current Rating	3 AMP
使用温度范围 Operating Temp	-55℃~+105℃

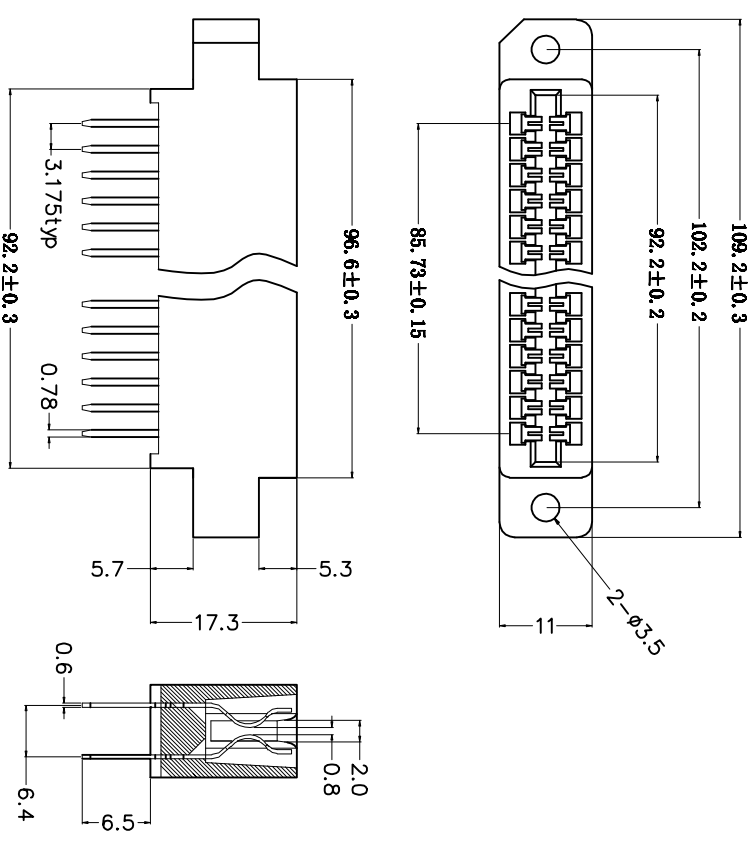

GENERAL TOLERANCE	ANGLE TOLERANCE
X ±0.60	X ±5°
.X ±0.38	.X ±3°
.XX ±0.25	.XX ±2°

PROJECTION	TITLE
UNITS mm	3175mm Edge Card Connector Slot
SHEET SIZE A4	SERIES LL1038-1

ITEM	CONTACT	HOUSING	PART NAME	DRAWING TYPE	CUSTOMER	SCALE	SHEET	1 OF 1	DRAWING NO.
1	CONTACT	HOUSING				1:1			
2	CONTACT	HOUSING							



慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.