
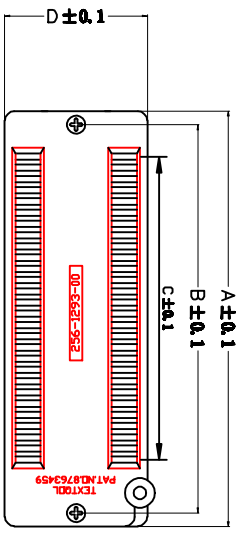


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B		CJJ 11/18/2014	~	ZQJ 11/18/2014
C		CJJ 11/18/2014	~	

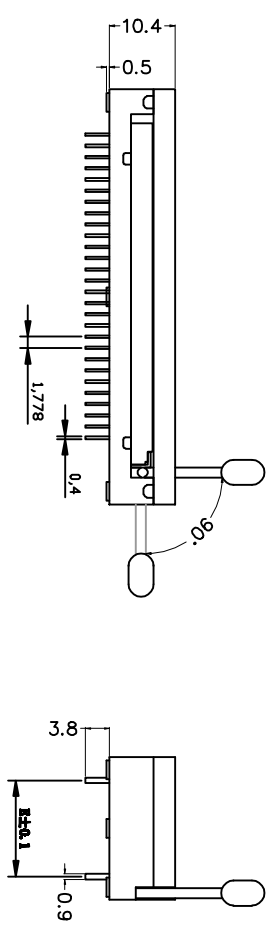

Material:
Housing: 30# Glass filled PBT UL94-0.
Contacts: Phosphor Bronze.
Plating: Gold plated; 3u" over 50u" nickel.
Tin plated 100u" over 50u" nickel.
Electrical Characteristics:
Current Rating: 1 AMP.
Insulator Resistance: 500MΩ min.at DC 500V
Contact Resistance: 20mΩ max.at DC 100mA
Operating Temperature:-55°-+105°.
Features:
For DIPs with 100° lead spacing
Lever actuated zero insertion force mechanism
Socket easily disassembles for reparability.
Socket contact pitch of 110 below top surface of socket.

Position	A	B	C	D	E
28P	40.1	36.1	23.11	17.5	10.16
32P	44.1	40.1	26.67	17.5	10.16
42P W	52.4	48.4	35.56	22.6	15.24
42P N	52.4	48.4	35.56	17.5	10.16
56P	64.8	60.8	48	22.6	15.24
64P	72	68	55.11	27.7	20.32

GENERAL TOLERANCE	ANGLE TOLERANCE
X, ±0.60	X, ±5°
.X, ±0.38	X, ±3°
.XX, ±0.25	.XX, ±2°

DRAWING TYPE	CUSTOMER
SCALE	1:1
DRAWING NO.	SHEET 1 OF 1

PROJECTION	TITLE
UNITS mm	SRINK ZIP SOCKET
SHEET SIZE A4	PITCH 1.778mm
SERIES	111003-1A

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.
Tel: 86-574-63519038 Fax: 86-574-63517070