

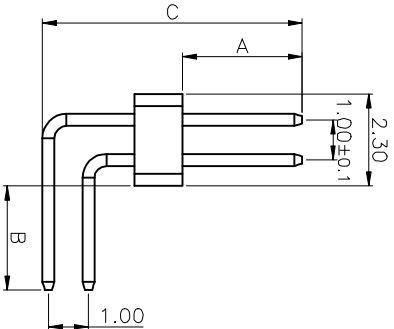
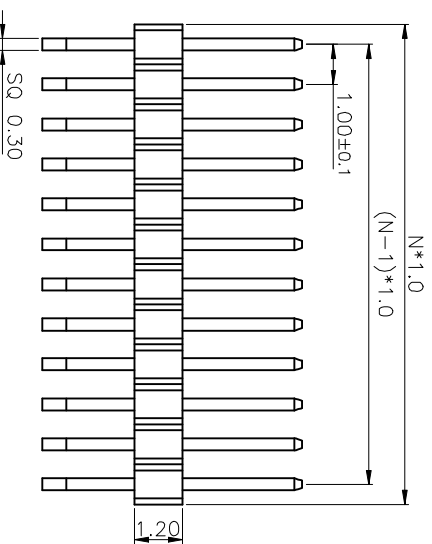



| REV. | DESCRIPTION | DRAWN | CHECKED | APPROVED |
|------|--------------|----------------|---------|----------------|
| A | NEW RELEASE | ZQJ 11/18/2014 | ~ | ZQJ 11/18/2014 |
| B | ADD P/N CODE | CJJ 11/18/2014 | ~ | |

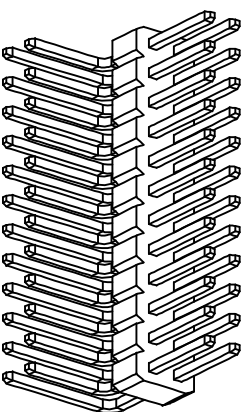

- NOTES:
- MATERIAL
 - INSULATOR:THERMOPLASTIC(UL 94V-0).
 - CONTACT MATERIAL: COPPER ALLOY.
 - SPECIFICATION
 - CURRENT RATING:1.0 Amp.
 - INSULATION RESISTANCE:500MΩ Min.
 - DIELECTRIC WITHSTANDING:600VAC.
 - CONTACT RESISTANCE:20mΩ Max.
 - OPERATING TEMPERATURE:-40°C TO+105°C.

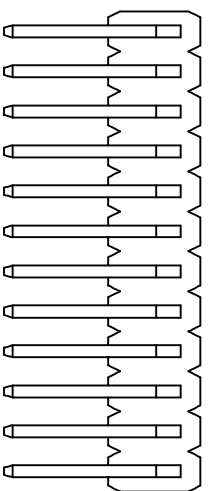

| TYPE | DIM A | DIM B | DIM C |
|------|-------|-------|-------|
| 1 | 3.00 | 2.60 | 6.50 |
| 2 | | | |
| 3 | | | |
| 4 | | | |
| 5 | | | |

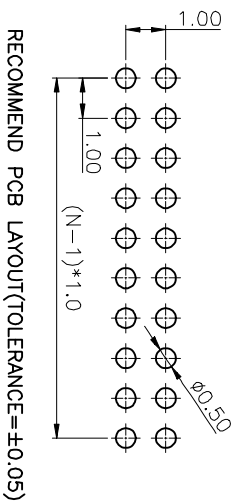

| GENERAL TOLERANCE | | ANGLE | TOLERANCE |
|-------------------|-------|-------|-----------|
| X | ±0.60 | X | ±5° |
| .X | ±0.38 | .X | ±3° |
| .XX | ±0.25 | .XX | ±2° |

| DRAWING TYPE | CUSTOMER |
|--------------|----------|
| SCALE | 1:1 |
| SHEET | 1 OF 1 |
| DRAWING NO. | |

| PROJECTION | TITLE |
|------------|----------------------|
| UNITS | DUAL ROW PIN HEADER |
| SHEET SIZE | PITCH 1.0mm R/A TYPE |
| A4 | LL1013-04G |

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.

蓝翎电子